



PRODUCT MATERIAL	Die-cast Aluminium
LIGHT SOURCE	LMR50
MODULE LIFETIME	Approx. 30.000 hours
DRIVER	Fixture excluding driver, select option
COLORS (Δ)	<input type="radio"/> 3 = RAL 9003 white <input checked="" type="radio"/> 5 = RAL 9005 black <input type="radio"/> 6 = RAL 9006 alu
BEAM ANGLE	
ADJUSTABLE	Yes
SIZE	98 X 98mm





OPTIONS LMR50

GLASS COVER CLEAR	Glass IP44 art. no.: 0053.999.99.0
OPTIONS DRIVERS	Fixed output 350mA 10W art. no.: 0110.350.10.0
	Phase-cut dimmable 350mA 7W art. no.: 0107.350.20.1
	1/10V dimmable 350mA 10W art. no.: 0110.350.30.0
	DALI dimmable 350mA 6-20W art. no.: 0120.350.40.0

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources. Full warranty only applies when fixture is purchased in combination with recommended driver.

altum

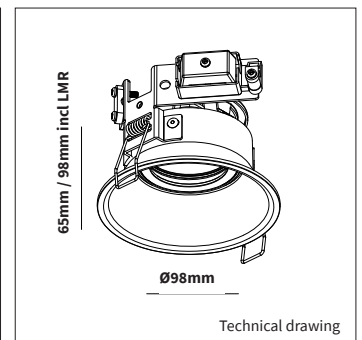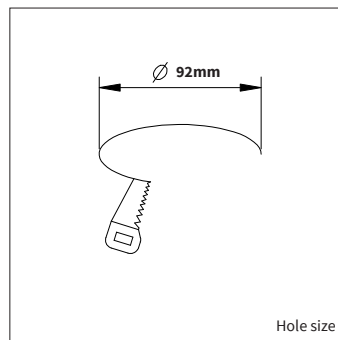

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	BEAM ANGLE	mA
Δ see colors										
4010.171.20.Δ	LMR50	Bridgelux V6	575lm	6,8W	85lm/W	2700K	>90	30.000 Hrs	20°	350mA
4010.172.30.Δ	LMR50	Bridgelux V6	575lm	6,8W	85lm/W	2700K	>90	30.000 Hrs	30°	350mA
4010.173.20.Δ	LMR50	Bridgelux V6	600lm	6,8W	88lm/W	3000K	>90	30.000 Hrs	20°	350mA
4010.174.30.Δ	LMR50	Bridgelux V6	600lm	6,8W	88lm/W	3000K	>90	30.000 Hrs	30°	350mA
4010.175.20.Δ	LMR50	Sharp GW6	563lm	6,6W	85lm/W	2000 - 2800K	>80	30.000 Hrs	20°	350mA
4010.176.30.Δ	LMR50	Sharp GW6	563lm	6,6W	85lm/W	2000 - 2800K	>80	30.000 Hrs	30°	350mA