



LOOK TOO

<b>PRODUCT MATERIAL</b>	Die-cast aluminium
<b>LIGHT SOURCE</b>	Bridgelux V8 array
<b>MODULE LIFETIME</b>	Approx. 35.000 hours
<b>DRIVER</b>	Fixture excluding driver, select option
<b>COLORS (Δ)</b>	● 5 = RAL 9005 black ○ + ● 35 = RAL 9003 white + RAL 9005 black
<b>BEAM ANGLE</b>	▲ 32°
<b>ADJUSTABLE</b>	350° rotational 90° rotational spot head
<b>SIZE</b>	212 X 100 X 103mm



OPTIONS


<b>OPTION DRIVERS</b>	Fixed output 500mA 12W art. no.: 0112.500.10.0
	Phase-cut dimmable 500mA 10W art. no.: 0110.500.20.2
	1/10V dimmable On request
	DALI dimmable 500mA 6-10W art. no.: 0110.500.40.0

LOOK TOO

INFORMATION

<b>WARRANTY</b>	2 Years
-----------------	---------

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources. Full warranty only applies when fixture is purchased in combination with recommended driver.

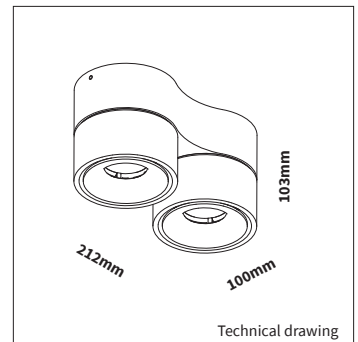

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	mA
6002.179.33.Δ	V8 Array	Bridgelux	2 X 970lm	2 X 9,3W	113lm/W	2700K	>90	35.000 Hrs	500mA

Δ see colors