

TRIMLESS 9-2



PRODUCT MATERIAL	Steel
LIGHT SOURCE	MR16 / GU10 / LMR50
DRIVER	LMR 50 includes a driver
COLORS (Δ)	<ul style="list-style-type: none"> ○ 3 = RAL 9003 white ● 5 = RAL 9005 black ● 6 = RAL 9006 alu
BEAM ANGLE	
ADJUSTABLE	Yes
SIZE	173.5 X 90.5 X 107MM



OPTIONS LMR

DIMMABLE DRIVERS <small>IN COMBINATION WITH THIS LUMINAIRE. ADDITIONAL PRICE.</small>	1/10v Dimmable 350mA 10W art. no.: 0110.350.10.1	€ 29,50
	Phase-cut Dimmable 350mA 10W art. no.: 0110.350.10.1	€ 29,50
	Dimmable DALI 350mA 18W art. no.: 0118.350.15.1	€ 55,00
GLASS COVER CLEAR	LMR50 glass IP44 art. no.: 0053.999.99.0	€ 7,50

TRIMLESS 9-2



INFORMATION

! Only luminaire body, lightsource and/or driver excluded.

LMR includes a driver, cable and plug.

LMR **Dim to Warm** includes a dimmable driver, cable and plug.

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources.

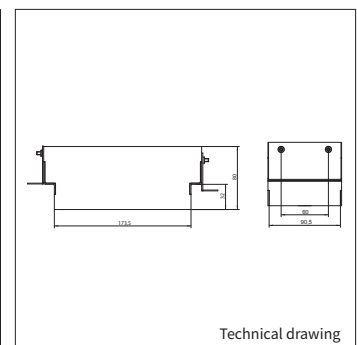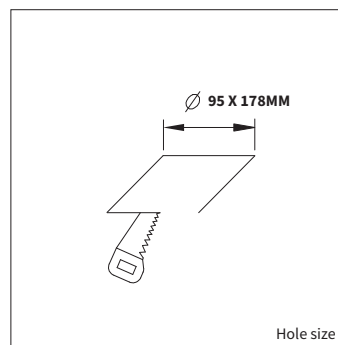

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	BEAM ANGLE	mA
Δ see colors										
! 4606.001.98.Δ	MR16	~	~	Max. 50W	~	~	~	~	~	~
! 4606.002.98.Δ	Gu10	~	~	Max. 50W	~	~	~	~	~	~
4606.171.20.Δ	LMR50	Bridgelux V6	2x 575LM	2x 6,8W	85LM/W	2700K	>90	30.000 Hrs	20°	350
4606.172.30.Δ	LMR50	Bridgelux V6	2x 575LM	2x 6,8W	85LM/W	2700K	>90	30.000 Hrs	30°	350
4606.173.20.Δ	LMR50	Bridgelux V6	2x 600LM	2x 6,8W	88LM/W	3000K	>90	30.000 Hrs	20°	350
4606.174.30.Δ	LMR50	Bridgelux V6	2x 600LM	2x 6,8W	88LM/W	3000K	>90	30.000 Hrs	30°	350
4606.175.20.Δ	LMR50	Sharp GW6	2x 563LM	2x 6,6W	85LM/W	2000 - 2800K DTW	>80	30.000 Hrs	20°	350
4606.176.30.Δ	LMR50	Sharp GW6	2x 563LM	2x 6,6W	85LM/W	2000 - 2800K DTW	>80	30.000 Hrs	30°	350