

KEYLIGHT

AIR ON





| | |
|-------------------------|---|
| PRODUCT MATERIAL | Aluminium |
| LIGHT SOURCE | Bridgelux Chip |
| MODULE LIFETIME | Approx. 50.000 hours |
| DRIVER | Excluding driver, SELECT OPTION |
| COLORS (Δ) | <ul style="list-style-type: none"> ○ 3 = RAL 9003 white ● 5 = RAL 9005 black ● 7 = Dark brass ● 1 = Dark bronze |
| BEAM ANGLE | Optional beam angle, SELECT OPTION |
| ADJUSTABLE | Horizontally and vertically rotational |
| SIZE | Ø30 X 65mm |



OPTIONS

| | |
|---|--|
| OPTIONAL BEAM ANGLE | 15° Art. no.: 4927.000.15.0 |
| | 24° Art. no.: 4927.000.24.0 |
| | 36° Art. no.: 4927.000.36.0 |
| ANTI-GLARE RING | Black Included |
| | Gold Art. no.: 4927.030.00.9 |
| | Dark brass Art. no.: 4927.030.00.7 |
| | Dark bronze Art. no.: 4927.030.00.1 |
| HONEYCOMB | Art. no.: 4927.040.00.0 |
| GLASS | Striped Art. no.: 4927.933.96.0 |
| | Frosted Art. no.: 4927.933.90.0 |
| DRIVER OPTIONS | On/off 180mA 1-7W Art. no.: 0107.180.10.1 Size: 115 x 34 x 19mm This driver can only be placed externally |
| | Phase cut 180mA 7W Art. no.: 4927.180.00.0 Size: 116 x 30 x 21mm This driver can only be placed externally |
| | DALI 180mA 2-7W Art. no.: 0103.180.40.1 Size: 130 x 30 x 22.2mm This driver can only be placed externally |
| POWER CABLE OPTIONS Connected to driver/fixture | Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0 |
| | Wieland GST 18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0 |
| | Wieland T connector GST 18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0 |

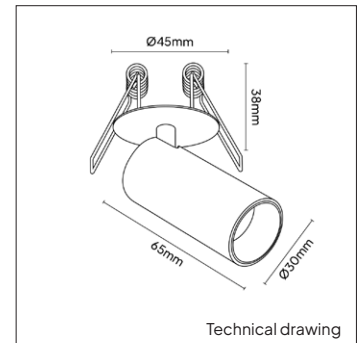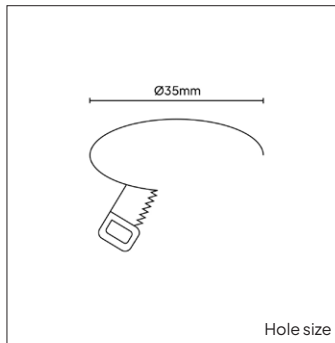

INFORMATION

Always select a driver option and add the selected driver to your order.

Full warranty only applies when fixture is purchased in combination with recommended driver.

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | CCOLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|----------------|-----------|-----------|---------------|--------------|-------------------|--------------------|-----|-------------|-------|
| 4927.270.00.Δ | Chip | Bridgelux | 387lm | 7W | 55lm/W | 2700K | >90 | 50.000 Hrs | 180mA |
| 4927.300.00.Δ | Chip | Bridgelux | 416lm | 7W | 59lm/W | 3000K | >90 | 50.000 Hrs | 180mA |

Δ See colors

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.