




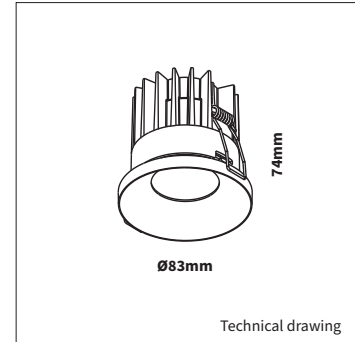
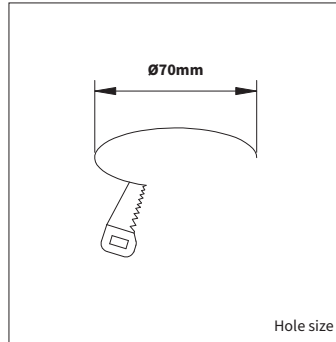
ALPHA CUP

PRODUCT MATERIAL	Die-cast aluminium
LIGHT SOURCE	Bridgelux V8 Array
MODULE LIFETIME	Approx. 35.000 hours
DRIVER	Excluding driver, SELECT OPTION
COLORS	● 5 = RAL 9005 black
BEAM ANGLE	 33°
ADJUSTABLE	No
SIZE	83 X 74mm



OPTIONS

DRIVER OPTIONS 350mA	On/off	350mA 6-10W Art. no.: 0110.350.10.3
	Phase cut	350mA 5-10W Art. no.: 0110.350.30.1
	1/10V	350mA 5-10W Art. no.: 0110.350.30.1
	DALI	350mA 3-18W Art. no.: 0118.350.40.0 Max. 2 fixtures connected in serie per driver
DRIVER OPTIONS 500mA	On/off	500mA 6-10W Art. no.: 0110.500.10.0
	Phase cut	500mA 5-10W Art. no.: 0110.500.30.1
	1/10V	500mA 5-10W Art. no.: 0110.500.30.1
	DALI	500mA 4-18W Art. no.: 0118.500.40.0
POWER CABLE OPTIONS Connected to driver/fixture		Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0
		Wieland GST 18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0
		Wieland T connector GST 18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0



INFORMATION

Always select a driver option and add the selected driver to your order.
Full warranty only applies when fixture is purchased in combination with recommended driver.

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.

ARTICLE NUMBER	COLOR	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
5109.997.35.5	● black	V8 Array	Bridgelux	565lm	6,2W	91lm/W	2700K	>90	35.000 Hrs	350mA
5109.997.50.5	● black	V8 Array	Bridgelux	760lm	9,2W	82lm/W	2700K	>90	35.000 Hrs	500mA