





| | |
|-------------------------|---|
| PRODUCT MATERIAL | Die-cast aluminium |
| LIGHT SOURCE | Bridgelux V8 Array |
| MODULE LIFETIME | Approx. 35.000 hours |
| DRIVER | Excluding driver, SELECT OPTION |
| COLORS | <input type="radio"/> 3 = RAL 9003 white <input checked="" type="radio"/> 5 = RAL 9005 black |
| BEAM ANGLE | |
| ADJUSTABLE | No |
| SIZE | Ø83 X 74mm |



OPTIONS

| | | |
|---|------------------|---|
| DRIVER OPTIONS 350mA | On/off | 350mA 6-10W Art. no.: 0110.350.10.3 |
| | Phase cut | 350mA 5-10W Art. no.: 0110.350.30.1 |
| | 1/10V | 350mA 5-10W Art. no.: 0110.350.30.1 |
| | DALI | 350mA 3-18W Art. no.: 0118.350.40.0 |
| Max. 2 fixtures connected in serie per driver | | |
| DRIVER OPTIONS 500mA | On/off | 500mA 6-10W Art. no.: 0110.500.10.0 |
| | Phase cut | 500mA 5-10W Art. no.: 0110.500.30.1 |
| | 1/10V | 500mA 5-10W Art. no.: 0110.500.30.1 |
| | DALI | 500mA 4-18W Art. no.: 0118.500.40.0 |
| POWER CABLE OPTIONS Connected to driver/fixture | | Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0 |
| | | Wieland GST 18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0 |
| | | Wieland T connector GST 18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0 |

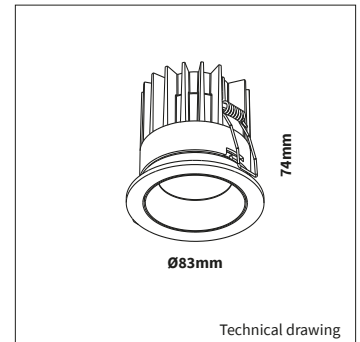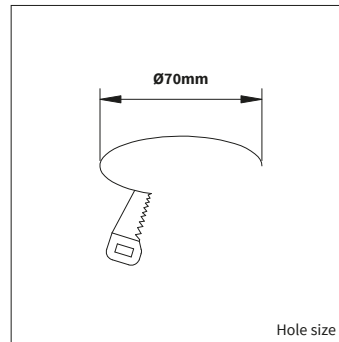

INSERTS



INFORMATION

Always select a driver option and add the selected driver to your order.
Full warranty only applies when fixture is purchased in combination with recommended driver.

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.

| ARTICLE NUMBER | COLOR | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|----------------|--|-----------|-----------|---------------|--------------|-------------------|-------------------|-----|-------------|-------|
| 5107.994.35.3 | <input type="radio"/> white | V8 Array | Bridgelux | 565lm | 6,2W | 91lm/W | 2700K | >90 | 35.000 Hrs | 350mA |
| 5107.994.35.35 | <input type="radio"/> <input checked="" type="radio"/> white / black | V8 Array | Bridgelux | 565lm | 6,2W | 91lm/W | 2700K | >90 | 35.000 Hrs | 350mA |
| 5107.994.35.5 | <input checked="" type="radio"/> black | V8 Array | Bridgelux | 565lm | 6,2W | 91lm/W | 2700K | >90 | 35.000 Hrs | 350mA |
| 5107.994.35.59 | <input checked="" type="radio"/> <input type="radio"/> black / gold | V8 Array | Bridgelux | 565lm | 6,2W | 91lm/W | 2700K | >90 | 35.000 Hrs | 350mA |
| 5109.994.50.3 | <input type="radio"/> white | V8 Array | Bridgelux | 760lm | 9,2W | 82lm/W | 2700K | >90 | 35.000 Hrs | 500mA |
| 5109.994.50.35 | <input type="radio"/> <input checked="" type="radio"/> white / black | V8 Array | Bridgelux | 760lm | 9,2W | 82lm/W | 2700K | >90 | 35.000 Hrs | 500mA |
| 5109.994.50.5 | <input checked="" type="radio"/> black | V8 Array | Bridgelux | 760lm | 9,2W | 82lm/W | 2700K | >90 | 35.000 Hrs | 500mA |
| 5109.994.50.59 | <input checked="" type="radio"/> <input type="radio"/> black / gold | V8 Array | Bridgelux | 760lm | 9,2W | 82lm/W | 2700K | >90 | 35.000 Hrs | 500mA |