



<b>PRODUCT MATERIAL</b>	Die-cast aluminium
<b>LIGHT SOURCE</b>	Bridgelux
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER</b>	Excluding driver, <b>SELECT OPTION</b>
<b>COLORS (Δ)</b>	○ 3 = RAL 9003 white   ● 7 = Dark brass ● 5 = RAL 9005 black   ● 1 = Dark bronze
<b>BEAM ANGLE</b>	▲ 24°
<b>ADJUSTABLE</b>	Fixed
<b>SIZE</b>	Ø62 X 68mm




## OPTIONS

<b>OPTIONAL BEAM ANGLE</b>	▲ 15° Art. no.: 4303.000.15.0 ▲ 36° Art. no.: 4303.000.36.0 ▲ 60° Art. no.: 4303.000.60.0
<b>ANTI-GLARE RING</b>	<b>Black chrome</b> Art. no.: 4303.030.00.5 <b>Matt black</b> Art. no.: 4303.030.01.5 <b>Matt white</b> Art. no.: 4303.030.00.3 <b>Dark Brass</b> Art. no.: 4303.030.00.7 <b>Dark Bronze</b> Art. no.: 4303.030.00.1
<b>GLASS</b>	<b>Striped</b> Art. no.: 4303.040.01.0 <b>Prismatic</b> Art. no.: 4303.040.02.0
<b>HONEYCOMB</b>	Art. no.: 4303.040.00.0
<b>DRIVER OPTIONS</b>	<b>On/off</b> 200mA 5-8W Art. no.: 0108.200.10.3 This driver can only be placed externally <b>Phase cut</b> 200mA 6-8W Art. no.: 0108.200.20.5 Size: 130x30x22.2mm <b>1/10V</b> 200mA 1-10W Art. no.: 0110.200.30.1 This driver can only be placed externally <b>DALI</b> 200mA 6-11W Art. no.: 0120.200.40.0 This driver can only be placed externally
<b>DRIVER OPTIONS DTW</b>	<b>On/off</b> 350mA 5-9W Art. no.: 0110.350.20.5 This driver can only be placed externally <b>Phase cut</b> 350mA 5-9W Art. no.: 0110.350.20.5 This driver can only be placed externally <b>1/10V</b> 350mA 1-19W Art. no.: 0119.350.30.0 This driver can only be placed externally <b>DALI</b> 350mA 8-19W Art. no.: 0120.350.40.0 This driver can only be placed externally
<b>POWER CABLE OPTIONS</b>	Europlug 2000mm 2X0.75 Art. no.: 0502.075.20.0 Wieland GST 18/3 male 2000mm 3X0.75 Art. no.: 0501.183.20.0 Wieland T connector GST 18/3 200mm 3X0.75 Art. no.: 0500.183.20.0

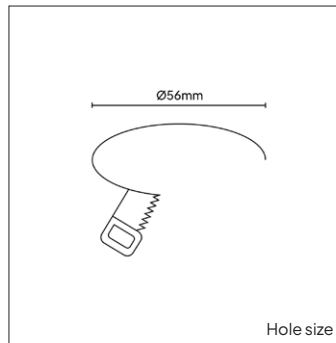

Hole size

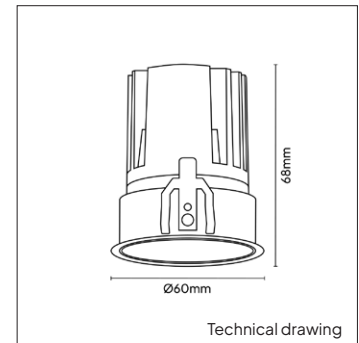

Technical drawing

## GLASS



Striped




Prismatic

## HONEYCOMB



Honeycomb

## ANTI-GLARE RING



Black chrome



Matte black



Matte white



Dark brass



Dark bronze

## INFORMATION

⚠ Full warranty only applies when fixture is purchased in combination with recommended driver.

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
4304.270.24.Δ	High Output	Bridgelux	400lm	8W	50lm/W	2700K	>90	50.000 Hrs	200mA
4304.300.24.Δ	High Output	Bridgelux	430lm	8W	54lm/W	3000K	>90	50.000 Hrs	200mA
<b>DTW</b>									
4304.125.24.Δ	High Output	Bridgelux	400lm	8W	50m/W	1800-2700K <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">DTW</span>	>90	50.000 Hrs	350mA

# KEYLIGHT





# BENTLI MINI FIXED TRIMLESS

<b>PRODUCT MATERIAL</b>	Die-cast aluminium
<b>LIGHT SOURCE</b>	Bridgelux
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER</b>	Excluding driver, <b>SELECT OPTION</b>
<b>COLORS (Δ)</b>	○ 3 = RAL 9003 white ● 7 = Dark brass ● 5 = RAL 9005 black ● 1 = Dark bronze
<b>BEAM ANGLE</b>	▲ 24°
<b>ADJUSTABLE</b>	Fixed
<b>SIZE</b>	Ø62 X 68mm



## OPTIONS

<b>OPTIONAL BEAM ANGLE</b>	▲ 15° Art. no.: 4303.000.15.0 ▲ 36° Art. no.: 4303.000.36.0 ▲ 60° Art. no.: 4303.000.60.0
<b>ANTI-GLARE RING</b>	<b>Black chrome</b> Art. no.: 4303.030.00.5 <b>Matt black</b> Art. no.: 4303.030.01.5 <b>Matt white</b> Art. no.: 4303.030.00.3 <b>Dark Brass</b> Art. no.: 4303.030.00.7 <b>Dark Bronze</b> Art. no.: 4303.030.00.1
<b>GLASS</b>	<b>Striped</b> Art. no.: 4303.040.01.0 <b>Prismatic</b> Art. no.: 4303.040.02.0
<b>HONEYCOMB</b>	Art. no.: 4303.040.00.0
<b>DRIVER OPTIONS</b>	<b>On/off</b> 200mA 5-8W Art. no.: 0108.200.10.3 This driver can only be placed externally <b>Phase cut</b> 200mA 6-8W Art. no.: 0108.200.20.5 Size: 130x30x22.2mm <b>1/10V</b> 200mA 1-10W Art. no.: 0110.200.30.1 This driver can only be placed externally <b>DALI</b> 200mA 6-11W Art. no.: 0120.200.40.0 This driver can only be placed externally
<b>DRIVER OPTIONS DTW</b>	<b>On/off</b> 350mA 5-9W Art. no.: 0110.350.20.5 This driver can only be placed externally <b>Phase cut</b> 350mA 5-9W Art. no.: 0110.350.20.5 This driver can only be placed externally <b>1/10V</b> 350mA 1-19W Art. no.: 0119.350.30.0 This driver can only be placed externally <b>DALI</b> 350mA 8-19W Art. no.: 0120.350.40.0 This driver can only be placed externally
<b>POWER CABLE OPTIONS</b> Connected to driver/fixture	Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0 Wieland GST 18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0 Wieland T connector GST 18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0

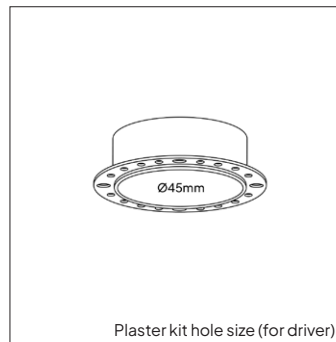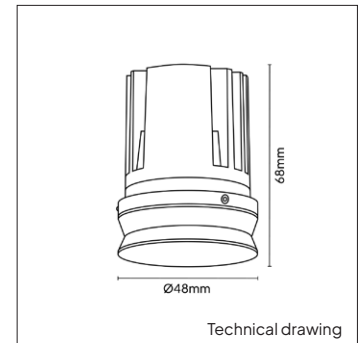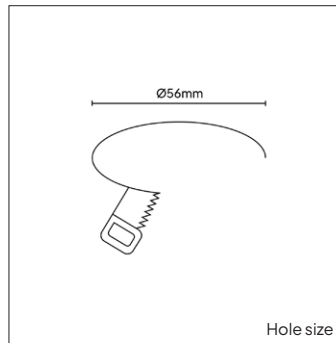

## ANTI-GLARE RING



## INFORMATION

⚠ Full warranty only applies when fixture is purchased in combination with recommended driver.

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
4306.270.24.Δ	High Output	Bridgelux	400lm	8W	50lm/W	2700K	>90	50.000 Hrs	200mA
4306.300.24.Δ	High Output	Bridgelux	430lm	8W	54lm/W	3000K	>90	50.000 Hrs	200mA
<b>DTW</b>									
4306.125.24.Δ	High Output	Bridgelux	400lm	8W	50m/W	1800-2700K <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">DTW</span>	>90	50.000 Hrs	350mA

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.