


PRODUCT MATERIAL	Die-cast Aluminium
ADAPTER	3-phase track adapter
LIGHT SOURCE	Bridgelux V10 Array
MODULE LIFETIME	Approx. 50.000 hours
DRIVER	Including phase cut dimmable driver
COLORS (Δ)	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
BEAM ANGLE	▲ 22°
ADJUSTABLE	Horizontally and vertically rotational
SIZE	Ø60 X 112mm



OPTIONS

OPTIONAL BEAM ANGLE	▲ 33° Art. no.: 3056.010.33.0
	▲ 50° Art. no.: 3056.010.50.0
ANTI-GLARE RING	Black anti-glare ring Included
	Gold anti-glare ring Art. no.: 3056.922.99.9
HONEYCOMB	Art. no.: 3056.933.94.0

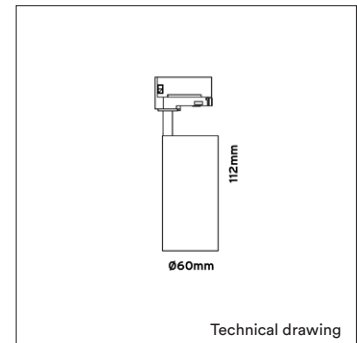

ANTI-GLARE RING



HONEYCOMB



ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
3056.997.50.Δ	V10 Array	Bridgelux	1356lm	12W	113lm/W	2700K	>90	35.000 Hrs	350mA
3056.300.50.Δ	V10 Array	Bridgelux	1458lm	12W	121lm/W	3000K	>90	35.000 Hrs	350mA

Δ See colors