


KEYLIGHT

BINNY FLAT


PRODUCT MATERIAL	Aluminium
LIGHT SOURCE	Bridgelux
MODULE LIFETIME	Approx. 50.000 hours
DRIVER	Including phase cut dimmable driver
COLORS (Δ)	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
BEAM ANGLE	 45°
ADJUSTABLE	Yes
SIZE	Ø85 X 28mm






OPTIONS

DRIVER OPTIONS	1/10V	250mA 1-14W Art. no.: 0114.250.30.0 Size: 108 x 52 x 22mm Max. 2 fixtures connected in serie per driver
	DALI	250mA 4-10W Art. no.: 0110.250.40.2 Size: 130 x 43 x 30mm Max. 2 fixtures connected in serie per driver

INFORMATION

 Allow for extra space behind recessed frame to install driver.

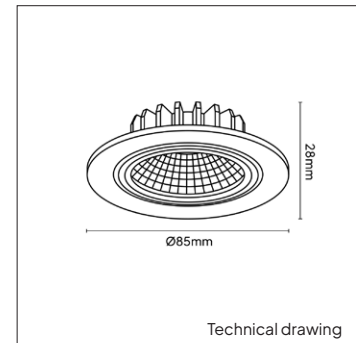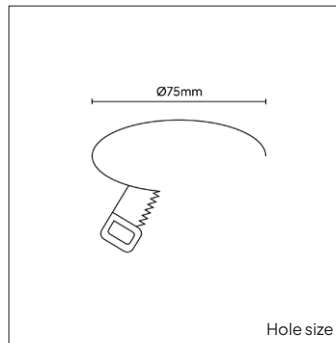

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
4290.300.45.Δ	BR.V6	Bridgelux	450lm	5W	90lm/W	2000-3000K 	>80	50.000 Hrs	250mA

Δ See colors

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.