



# BLOCK 6 UD


<b>PRODUCT MATERIAL</b>	Die-cast aluminium
<b>LIGHT SOURCE</b>	Bridgelux V6 Array
<b>MODULE LIFETIME</b>	Approx. 30.000 hours
<b>DRIVER</b>	Including phase cut dimmable driver
<b>COLORS (Δ)</b>	● 5 = RAL 9005 black ● 9 = RAL 7012 grey
<b>SIZE</b>	105 X 125 X 60mm
<b>BEAM ANGLE</b>	20° 20°



## INFORMATION

Up/dn including 2 X IP65 glass cover

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.

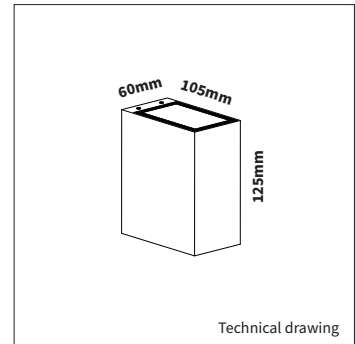

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
6018.827.20.Δ	V6 Array	Bridgelux	2 X 420lm	2 X 4,6W	104lm/W	2700K	>80	30.000 Hrs	500mA

Δ See colors