



<b>PRODUCT MATERIAL</b>	Die-cast aluminium
<b>LIGHT SOURCE</b>	Philips SLM G7
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER</b>	Including Xitanium driver
<b>COLORS (Δ)</b>	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
<b>BEAM ANGLE</b>	▲ 24°
<b>ADJUSTABLE</b>	Yes
<b>SIZE</b>	Ø146 X 263mm



**OPTIONS**


<b>OPTIONAL BEAM ANGLE</b>	▲ 18°	Art. no.: 3045.018.00.0
	▲ 36°	Art. no.: 3045.036.00.0
	▲ 60°	Art. no.: 3045.060.00.0
	▲ 80°	Art. no.: 3045.080.00.0
<b>DIMMABLE</b>	Phase cut dimmable driver	
	DALI dimmable driver	
<b>POWER CABLE OPTIONS</b> Connected to driver/fixture	Europlug 2000mm 2 X 0,75	Included
	Wieland GST 18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0	
	Wieland T connector GST 18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0	
<b>WIRELESS DIMMABLE</b>	Masterconnect, Easy Air/Zigbee	

**INFORMATION**


Nominal lifetime L90/B50 @50.000 h - 25°C

This luminaire is equipped with an innovative lens technology instead of a reflector  
**High quality led lens technology + 10% more light output**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

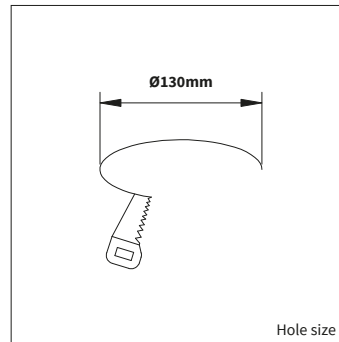

Hole size

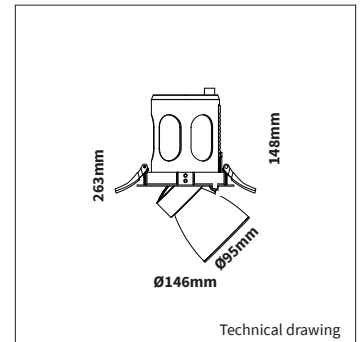

Technical drawing

**AVAILABLE SLM OPTIONS**

To order the correct product, please replace **COB\*** in the article number field with the COB code found on the last page of the catalogue

ARTICLE NUMBER	LUMINOUS FLUX	BRAND	COLOR TEMPERATURE	SETTING
Δ See colors				
4028. <b>COB*</b> .24.Δ	1100lm	Philips SLM G7	827 / 927 / 830 / 930 / 835 / 840 / 850	High Efficiency
4028. <b>COB*</b> .24.Δ	1100lm	Philips SLM G7	Premium White 830 / 930 / 935 / 940	High Efficiency
4028. <b>COB*</b> .24.Δ	1100lm	Philips SLM G7	Premium White HE 930	High Efficiency
4028. <b>COB*</b> .24.Δ	1100lm	Philips SLM G7	Premium Color 930	High Efficiency
4028. <b>COB*</b> .24.Δ	1100lm	Philips SLM G7	Premium Color HE 930	High Efficiency
4028. <b>COB*</b> .24.Δ	1100lm	Philips SLM G7	Crisp White 930	High Efficiency
4028. <b>COB*</b> .24.Δ	1100lm	Philips SLM G7	Food: Meat / Bakery / Iced Seafood / Live Seafood / Vegetables & Fruit	High Efficiency
4028. <b>COB*</b> .24.Δ	2000lm	Philips SLM G7	827 / 927 / 830 / 930 / 835 / 840 / 850	High Efficiency
4028. <b>COB*</b> .24.Δ	2000lm	Philips SLM G7	Premium White 830 / 930 / 935 / 940	High Efficiency
4028. <b>COB*</b> .24.Δ	2000lm	Philips SLM G7	Premium White HE 930	High Efficiency
4028. <b>COB*</b> .24.Δ	2000lm	Philips SLM G7	Premium Color 930	High Efficiency
4028. <b>COB*</b> .24.Δ	2000lm	Philips SLM G7	Premium Color HE 930	High Efficiency
4028. <b>COB*</b> .24.Δ	2000lm	Philips SLM G7	Crisp White 930	High Efficiency
4028. <b>COB*</b> .24.Δ	2000lm	Philips SLM G7	Food: Meat / Bakery / Iced Seafood / Live Seafood / Vegetables & Fruit	High Efficiency
4028. <b>COB*</b> .24.Δ	3000lm	Philips SLM G7	827 / 927 / 830 / 930 / 835 / 840 / 850 / 857	High Efficiency
4028. <b>COB*</b> .24.Δ	3000lm	Philips SLM G7	Premium White 830 / 930 / 935 / 940	High Efficiency
4028. <b>COB*</b> .24.Δ	3000lm	Philips SLM G7	Premium White HE 930	High Efficiency
4028. <b>COB*</b> .24.Δ	3000lm	Philips SLM G7	Premium Color 930	High Efficiency
4028. <b>COB*</b> .24.Δ	3000lm	Philips SLM G7	Premium Color HE 930	High Efficiency
4028. <b>COB*</b> .24.Δ	3000lm	Philips SLM G7	Crisp White 930	High Efficiency
4028. <b>COB*</b> .24.Δ	4500lm	Philips SLM G7	827 / 830 / 835 / 840 / 850 / 857	High Efficiency
4028. <b>COB*</b> .24.Δ	4500lm	Philips SLM G7	Premium White 830 / 940	High Efficiency

High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.