


KEYLIGHT

CAP

PRODUCT MATERIAL	Die-cast Aluminium
LIGHT SOURCE	Bridgelux V8
MODULE LIFETIME	Approx. 50.000 hours
DRIVER	Excluding driver, SELECT OPTION
COLORS (Δ)	<input type="radio"/> 3 = RAL 9003 white <input checked="" type="radio"/> 5 = RAL 9005 black
BEAM ANGLE	 24°
ADJUSTABLE	Yes
SIZE	Ø105 X 77mm




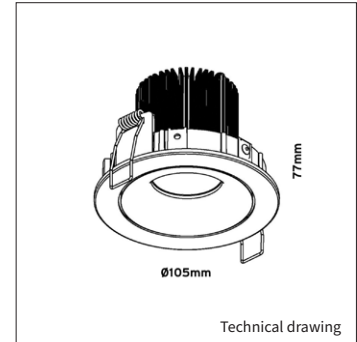
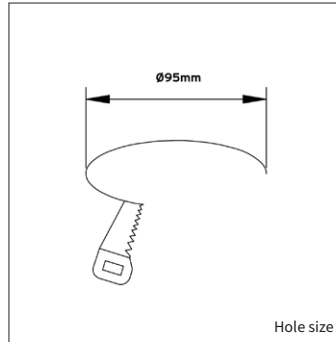
OPTIONS

DRIVER OPTIONS	On/off	350mA6-10W Art. no.: 0110.350.10.3
	Phase cut	350mA 1-7W Art. no.: 0107.350.20.2
	DALI	350mA 3-18W Art. no.: 0118.350.40.0 Max. 2 fixtures connected in serie per driver
POWER CABLE OPTIONS Connected to driver/fixture	Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0	
	Wieland GST 18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0	
	Wieland T connector GST 18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0	

INFORMATION

Always select a driver option and add the selected driver to your order.

 Full warranty only applies when fixture is purchased in combination with recommended driver.



ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
4005.990.28.Δ	V8	Bridgelux	676lm	6,2W	109lm/W	2700K	>90	50.000 Hrs	350mA

Δ See colors

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.