



PRODUCT MATERIAL

Aluminium

ADAPTER

3-phase track adapter

LIGHT SOURCE

GU10

MODULE LIFETIME

Approx. 30.000 / 50.000 hours

COLORS (Δ)

- 3 = RAL 9003 white
- 5 = RAL 9005 black

BEAM ANGLE



BEAM ANGLE DTW



ADJUSTABLE

Yes


SIZE

Ø60 X 130mm



INFORMATION

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources.

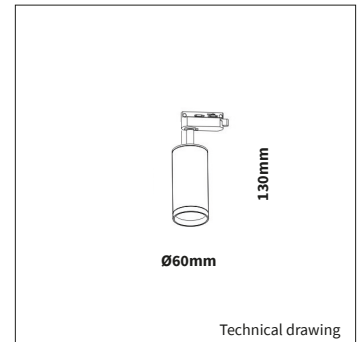

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	BEAM ANGLE
3130.272.25.Δ	GU10	Philips	265lm	4W	66lm/W	2700K	>90	50.000 Hrs	25°
3130.279.36.Δ	GU10	Philips	265lm	4W	66lm/W	2700K	>90	50.000 Hrs	36°
3130.282.25.Δ	GU10	Philips	280lm	4W	70lm/W	3000K	>90	50.000 Hrs	25°
3130.290.36.Δ	GU10	Philips	280lm	4W	70lm/W	3000K	>90	50.000 Hrs	36°
3130.175.20.Δ	GU10	KL	280lm	5W	56lm/W	2200-2650K	>90	30.000 Hrs	24°

Δ See colors

DTW