


PRODUCT MATERIAL	Die-cast aluminium
LIGHT SOURCE	Bridgelux V8 Array
MODULE LIFETIME	Approx. 50.000 hours
DRIVER	Including phase cut dimmable driver
COLORS (Δ)	<input type="radio"/> 3 = RAL 9003 white <input checked="" type="radio"/> 5 = RAL 9005 black
BEAM ANGLE	 33°
ADJUSTABLE	No
SIZE	85 X 85 X 100mm




OPTIONS

DRIVER OPTIONS	1/10V	500mA 7-10W Art. no.: 0110.500.30.2
	DALI	500mA 7-10W Art. no.: 0110.500.40.2

INFORMATION

 Full warranty only applies when fixture is purchased in combination with recommended driver.

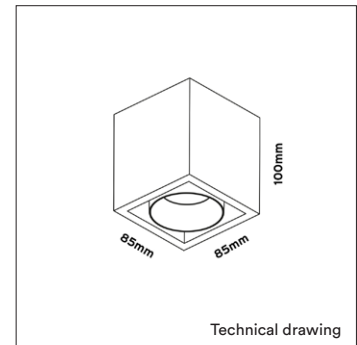

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
5105.995.33.33 (white)	V8 Array	Bridgelux	745lm	9,2W	80lm/W	2700K	>90	35.000 Hrs	500mA
5105.995.33.55 (Black)	V8 Array	Bridgelux	745lm	9,2W	80lm/W	2700K	>90	35.000 Hrs	500mA

Δ See colors