



PRODUCT MATERIAL	Die-cast aluminium
LIGHT SOURCE	Bridgelux V8 Array
MODULE LIFETIME	Approx. 35.000 hours
DRIVER	Including phase cut dimmable driver
COLORS	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
BEAM ANGLE	33°
ADJUSTABLE	No
SIZE	85 X 85 X 93mm



OPTIONS


DRIVER OPTIONS	1/10V	500mA 7-10W Art. no.: 0110.500.30.2
	DALI	500mA 7-10W Art. no.: 0110.500.40.2

INFORMATION


Also available IP65 Outdoor recessed & surface

Full warranty only applies when fixture is purchased in combination with recommended driver.

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources.

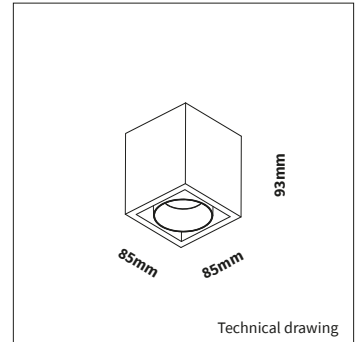

INSERTS



ARTICLE NUMBER	COLOR	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
5105.993.33.3	○ white	V8 Array	Bridgelux	745lm	9,2W	80lm/W	2700K	>90	35.000 Hrs	500mA
5105.993.33.35	○● white / black	V8 Array	Bridgelux	745lm	9,2W	80lm/W	2700K	>90	35.000 Hrs	500mA
5105.993.33.39	○● white / gold	V8 Array	Bridgelux	745lm	9,2W	80lm/W	2700K	>90	35.000 Hrs	500mA
5105.993.33.5	● black	V8 Array	Bridgelux	745lm	9,2W	80lm/W	2700K	>90	35.000 Hrs	500mA
5105.993.33.53	○● black / white	V8 Array	Bridgelux	745lm	9,2W	80lm/W	2700K	>90	35.000 Hrs	500mA
5105.993.33.59	●● black / gold	V8 Array	Bridgelux	745lm	9,2W	80lm/W	2700K	>90	35.000 Hrs	500mA