



PRODUCT MATERIAL	Aluminium body
LIGHT SOURCE	Bridgelux V13B
MODULE LIFETIME	Approx. 50.000 hours
DRIVER	Option
COLORS	● 8 = Stainless steel
BEAM ANGLE	▲ 55°
SIZE	Ø123 X 158mm

OPTIONS

OPTIONAL BEAM ANGLE	▲ 15° Art. no.: 8109.000.15.0
	▲ 24° Art. no.: 8109.000.24.0
DIMMABLE	On request For centralized drivers please contact sales



INFORMATION

Tempered glass standard

Including 1,5m cable


Stainless steel ring (316)

IK 10

Mounting instruction:

For mounting instructions please visit www.key-light.nl. Full warranty only applies when fixture is mounted according to these instructions

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources.

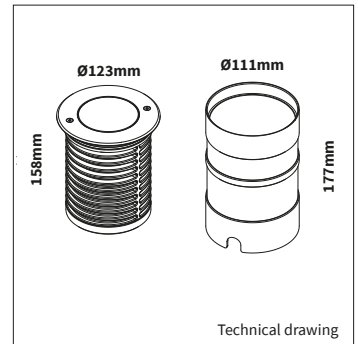

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	BEAM ANGLE	TC LIFETIME	mA
8109.500.55.8	V13B	Bridgelux	2500lm	18W	139lm/W	2700K	>80	55°	50.000 Hrs	500mA
8109.000.55.8	V13B	Bridgelux	2500lm	18W	139lm/W	2700K	>80	55°	50.000 Hrs	500mA