

# KEYLIGHT

# FUSE UD

<b>PRODUCT MATERIAL</b>	Aluminium and PC
<b>LIGHT SOURCE</b>	LED GU10
<b>MODULE LIFETIME</b>	Approx. 30.000 / 50.000 hours
<b>COLORS (Δ)</b>	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
<b>BEAM ANGLE</b>	▲ 20° ▲ 36°
<b>BEAM ANGLE (DTW)</b>	▲ 30°
<b>SIZE</b>	Ø60 X 72 X 220mm




## OPTIONS

<b>ANTI-GLARE RING</b>	Gold Art. no.: 2 X 3056.922.99.9
------------------------	-------------------------------------

## INFORMATION

⚠ Max. hole size for the wall mounting is 40 x 75mm (W X H)

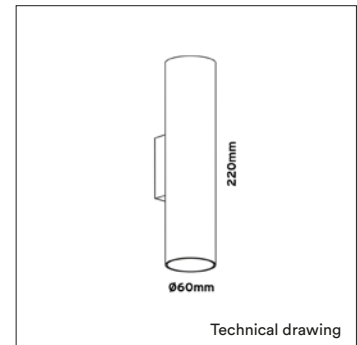

### ANTI-GLARE RING



ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	BEAM ANGLE
Δ See colors									
6182.272.20.Δ	GU10	Philips	265lm	2 X 4W	66lm/W	2700K	>90	50.000 Hrs	20°
6182.279.36.Δ	GU10	Philips	265lm	2 X 4W	66lm/W	2700K	>90	50.000 Hrs	36°
6182.282.20.Δ	GU10	Philips	280lm	2 X 4W	70lm/W	3000K	>90	50.000 Hrs	20°
6182.290.36.Δ	GU10	Philips	280lm	2 X 4W	70lm/W	3000K	>90	50.000 Hrs	36°
6182.176.30.Δ	GU10	KL	305lm	2 X 5W	61lm/W	2000 - 3000K <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">DTW</span>	>90	30.000 Hrs	30°