



# GARDEN SPOT S

<b>PRODUCT MATERIAL</b>	Aluminium
<b>LIGHT SOURCE</b>	Bridgelux C6/C8
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER</b>	Option
<b>COLORS</b>	● 5 = RAL 9005 black
<b>BEAM ANGLE</b>	▲ 25° ▲ 38°
<b>SIZE</b>	162 X Ø75 X 995mm





<b>OPTIONS</b>	
<b>DIMMABLE</b>	On request For centralized drivers please contact sales

## INFORMATION

Alu body and mounting plate with spike in black with 90cm pole. Mounting pole can be cut to desired height

Including 1500mm cable

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.

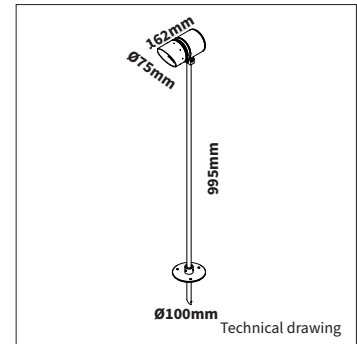

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA	Driver
<b>Garden 5W 38°</b>										
8142.005.38.5	C6	Bridgelux	513lm	5W	103lm/W	2700K	>80	50.000 Hrs	500mA	Included
8142.105.38.5	C6	Bridgelux	513lm	5W	103lm/W	2700K	>80	50.000 Hrs	500mA	Excluded
<b>Garden 10W 25°</b>										
8142.010.25.5	C8	Bridgelux	900lm	10W	90lm/W	2700K	>80	50.000 Hrs	250mA	Included
8142.110.25.5	C8	Bridgelux	900lm	10W	90m/W	2700K	>80	50.000 Hrs	250mA	Excluded