



<b>PRODUCT MATERIAL</b>	Die-cast Aluminium
<b>LIGHT SOURCE</b>	Bridgelux V8 Array
<b>MODULE LIFETIME</b>	Approx. 35.000 hours
<b>DRIVER</b>	Excluding driver, <b>SELECT OPTION</b>
<b>COLORS (Δ)</b>	<ul style="list-style-type: none"> <li>● <b>35</b> = RAL 9003 white + RAL 9005 black</li> <li>● <b>5</b> = RAL 9005 black</li> <li>● <b>7</b> = RAL 7037 grey</li> </ul>
<b>BEAM ANGLE</b>	26°
<b>ADJUSTABLE</b>	Yes - 0-20° - 360°
<b>SIZE</b>	Ø91 X 100mm

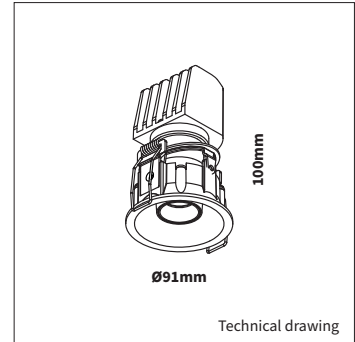

**OPTIONS**

<b>OPTIONAL BEAM ANGLE</b>	36° Art. no.: 4912.010.36.0
<b>ANTI-GLARE RING</b>	Black anti-glare ring <span style="float: right;">Included</span>
	White anti-glare ring Art. no.: 4912.922.99.3
	Gold anti-glare ring Art. no.: 4912.922.99.9
<b>GLASS</b>	Prismatic Art. no.: 4912.933.94.0
	Frosted Art. no.: 4912.933.90.0
	Striped Art. no.: 4912.933.96.0
<b>HONEYCOMB</b>	Art. no.: 4912.933.91.0
<b>DRIVER OPTIONS 350mA</b>	<b>On/off</b> 350mA 6-10W Art. no.: 0110.350.10.3
	<b>Phase cut</b> 350mA 5-10W Art. no.: 0110.350.30.1
	<b>1/10V</b> 350mA 5-10W Art. no.: 0110.350.30.1
	<b>DALI</b> 350mA 3-18W Art. no.: 0118.350.40.0 <b>Max. 2 fixtures connected in serie per driver</b>
<b>DRIVER OPTIONS 500mA</b>	<b>On/off</b> 500mA 6-10W Art. no.: 0110.500.10.0
	<b>Phase cut</b> 500mA 5-10W Art. no.: 0110.500.30.1
	<b>1/10V</b> 500mA 5-10W Art. no.: 0110.500.30.1
	<b>DALI</b> 500mA 4-18W Art. no.: 0118.500.40.0
<b>POWER CABLE OPTIONS</b> Connected to driver/fixture	Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0
	Wieland GST 18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0
	Wieland T connector GST 18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0

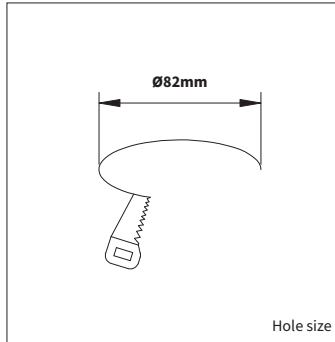

**ANTI-GLARE RING**



Black White Gold

**GLASS**



Striped Frosted Prismatic

**HONEYCOMB**



Honeycomb

**INFORMATION**

Always select a driver option and add the selected driver to your order.  
Full warranty only applies when fixture is purchased in combination with recommended driver.

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
4915.179.26.Δ	V8 Array	Bridgelux	550lm	6,2W	88lm/W	2700K	>90	35.000 Hrs	350mA
4915.180.26.Δ	V8 Array	Bridgelux	745lm	9,3W	81lm/W	2700K	>90	35.000 Hrs	500mA

Δ See colors