





| | |
|-------------------------|--|
| PRODUCT MATERIAL | Die-cast aluminium |
| LIGHT SOURCE | Bridgelux V8 Array |
| MODULE LIFETIME | Approx. 50.000 hours |
| DRIVER | Excluding driver, SELECT OPTION |
| COLORS (Δ) | <ul style="list-style-type: none"> ● 35 = RAL 9003 white + RAL 9005 black ● 5 = RAL 9005 black ● 7 = RAL 7037 grey |
| BEAM ANGLE |  26° |
| ADJUSTABLE | Yes - 0-20° - 360° |
| SIZE | 191 X 84 X 100mm |



OPTIONS


| | |
|---|--|
| OPTIONAL BEAM ANGLE |  36° Art. no.: 2 X 4912.010.36.0 |
| ANTI-GLARE RING | Black Included |
| | White Art. no.: 2 X 4912.922.99.3 |
| | Gold Art. no.: 2 X 4912.922.99.9 |
| GLASS | Prismatic Art. no.: 2 X 4912.933.94.0 |
| | Frosted Art. no.: 2 X 4912.933.90.0 |
| | Striped Art. no.: 2 X 4912.933.96.0 |
| HONEYCOMB | Art. no.: 2 X 4912.933.91.0 |
| DRIVER OPTIONS 350mA | On/off 350mA 11-16W Art. no.: 0116.350.10.3 |
| | Phase cut 350mA 6-13W Art. no.: 0113.350.20.1 |
| | DALI 350mA 3-18W Art. no.: 0118.350.40.0 |
| DRIVER OPTIONS 500mA | On/off 500mA 16-23W Art. no.: 0123.500.10.1 |
| | Phase cut 500mA 8-20W Art. no.: 0120.500.20.0 |
| | 1/10V 500mA 13-20W Art. no.: 0120.500.30.4 |
| | DALI 500mA 12-27W Art. no.: 0136.500.40.0 |
| POWER CABLE OPTIONS Connected to driver/fixture | Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0 |
| | Wieland GST 18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0 |
| | Wieland T connector GST 18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0 |

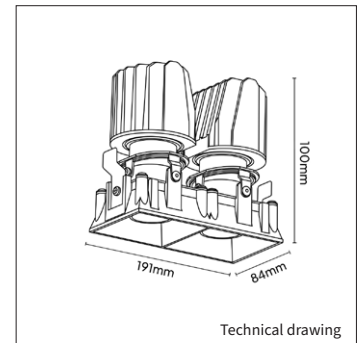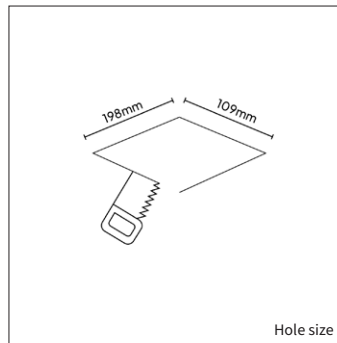

ANTI-GLARE RING




GLASS

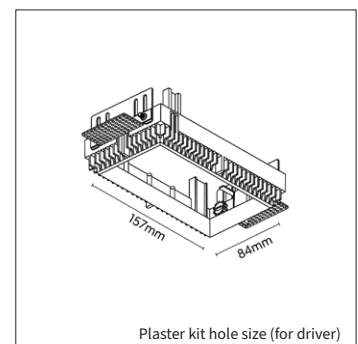


INFORMATION

Including plaster kit

Always select a driver option and add the selected driver to your order.

 Pay attention to the inner size (157 X 84mm) of the plaster kit, as the chosen driver needs to fit through this hole.

 Full warranty only applies when fixture is purchased in combination with recommended driver.

HONEYCOMB



Honeycomb

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|----------------|-----------|-----------|---------------|--------------|-------------------|-------------------|-----|-------------|-------|
| 4914.179.26.Δ | V8 Array | Bridgelux | 2 X 550lm | 2 X 6,2W | 88lm/W | 2700K | >90 | 50.000 Hrs | 350mA |
| 4914.180.26.Δ | V8 Array | Bridgelux | 2 X 745lm | 2 X 9,2W | 81lm/W | 2700K | >90 | 50.000 Hrs | 500mA |

Δ See colors