




KEYLIGHT



GIBLI SQ MINI 2 TRIMLESS

PRODUCT MATERIAL	Die-cast aluminium
LIGHT SOURCE	Citizen CLU701
MODULE LIFETIME	Approx. 35.000 hours
DRIVER	Excluding driver, SELECT OPTION
COLORS (Δ)	<input type="radio"/> 3 = RAL 9003 white <input checked="" type="radio"/> 5 = RAL 9005 black
BEAM ANGLE	 24°
ADJUSTABLE	Yes - 0-20° - 360°
SIZE	108 X 57 X 100mm



OPTIONS


OPTIONAL BEAM ANGLE	 33° Art. no.: 2X4930.010.33.0
	 44° Art. no.: 2X4930.010.44.0
ANTI-GLARE RING	Black Included
	Gold Art. no.: 2X4930.030.00.9
DRIVER OPTIONS	On/off 250mA 6-10W Art. no.: 2X0115.250.10.0
	Phase cut 250mA 7-10W Art. no.: 2X0110.250.20.4
	1/10V 250mA 1-14W Art. no.: 2X0114.250.30.0
	DALI 250mA 6-13W Art. no.: 2X0114.250.40.1
POWER CABLE OPTIONS Connected to driver/fixture	Europlug 2000mm 2X0,75 Art. no.: 2X0502.075.20.0
	Wieland GST18/3 male 2000mm 3X0,75 Art. no.: 2X0501.183.20.0
	Wieland T connector GST18/3 200mm 3X0,75 Art. no.: 2X0500.183.20.0

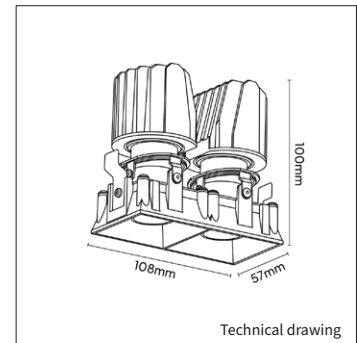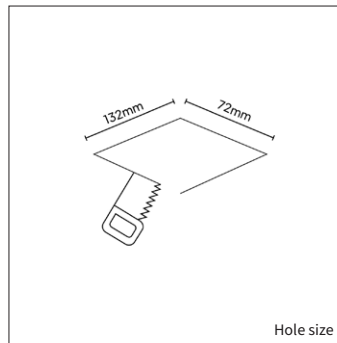


INFORMATION


Including plaster kit

Always select a driver option and add the selected driver to your order.

 Pay attention at the inner size (Ø55mm) of the plaster kit, as the chosen driver needs to fit through this hole.

 Full warranty only applies when fixture is purchased in combination with recommended driver.

ANTI-GLARE RING

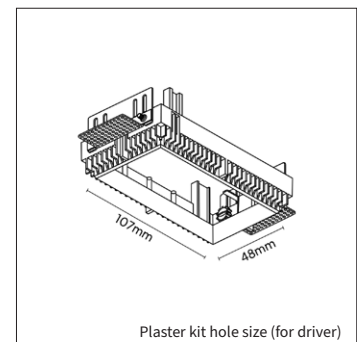

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
----------------	-----------	-------	---------------	--------------	-------------------	-------------------	-----	-------------	----

Δ See colors

4932.250.24.Δ	CLU701	CITIZEN	2X770lm	2X7,5W	102lm/W	2700K	>90	35.000 Hrs	250mA
---------------	--------	---------	---------	--------	---------	-------	-----	------------	-------

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.