


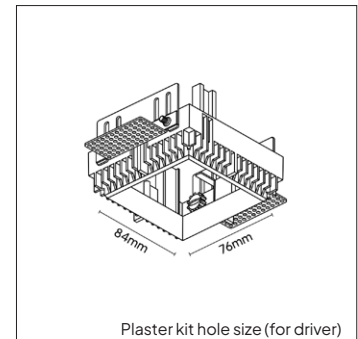

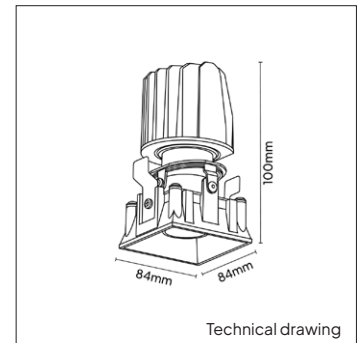
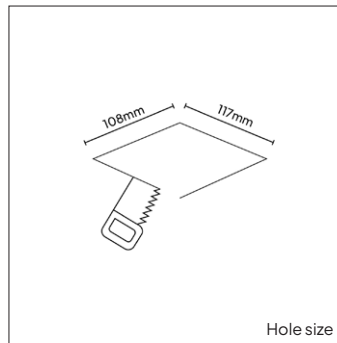


PRODUCT MATERIAL	Die-cast aluminium
LIGHT SOURCE	Bridgelux V8 Array
MODULE LIFETIME	Approx. 50.000 hours
DRIVER	Excluding driver, SELECT OPTION
COLORS (Δ)	<ul style="list-style-type: none"> ● 35 = RAL 9003 white + RAL 9005 black ● 5 = RAL 9005 black ● 7 = RAL 7037 grey
BEAM ANGLE	 26°
ADJUSTABLE	Yes - 0-20° - 360°
SIZE	84 X 84 X 100mm



OPTIONS


OPTIONAL BEAM ANGLE	 Art. no.: 4912.010.36.0
ANTI-GLARE RING	Black Included
	White Art. no.: 4912.922.99.3
	Gold Art. no.: 4912.922.99.9
GLASS	Prismatic Art. no.: 4912.933.94.0
	Frosted Art. no.: 4912.933.90.0
	Striped art. no.: 4912.933.96.0
HONEYCOMB	Art. no.: 4912.933.91.0
DRIVER OPTIONS 350mA	On/off 350mA 6-10W Art. no.: 0110.350.10.3
	Phase cut 350mA 1-7W Art. no.: 0107.350.20.2
	DALI 350mA 3-18W Art. no.: 0118.350.40.0 Max. 2 fixtures connected in serie per driver
DRIVER OPTIONS 500mA	On/off 500mA 6-10W Art. no.: 0110.500.10.0
	Phase cut 500mA 6-10W Art. no.: 0110.500.20.7
	DALI 500mA 4-18W Art. no.: 0118.500.40.0
POWER CABLE OPTIONS Connected to driver/fixture	Europlug 2000mm 2X 0,75 Art. no.: 0502.075.20.0
	Wieland GST 18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0
	Wieland T connector GST 18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0



INFORMATION

Including plaster kit

Always select a driver option and add the selected driver to your order.

 Pay attention at the inner size (84 x 76mm) of the plaster kit, as the chosen driver needs to fit through this hole.

 Full warranty only applies when fixture is purchased in combination with recommended driver.

HONEYCOMB



Honeycomb

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
4913.179.26.Δ	V8 Array	Bridgelux	550lm	6,2W	88lm/W	2700K	>90	50.000 Hrs	350mA
4913.379.26.Δ	V8 Array	Bridgelux	591lm	6,2W	95lm/W	3000K	>90	50.000 Hrs	350mA
4913.180.26.Δ	V8 Array	Bridgelux	745lm	9,2W	81lm/W	2700K	>90	50.000 Hrs	500mA
4913.380.26.Δ	V8 Array	Bridgelux	801lm	9,2W	87lm/W	3000K	>90	50.000 Hrs	500mA

Δ See colors