

PRODUCT MATERIAL	Aluminium and Polycarbonate
LIGHT SOURCE	LEDD
MODULE LIFETIME	Approx. 60.000 hours
DRIVER	Including on/off driver
COLORS	○ 3 = RAL 9010 white
ADJUSTABLE	No
SIZE	Different sizes available







OPTIONS

SURFACE FRAME 600X600MM	Art. no.: 4743.000.00.3
SURFACE FRAME 300X1200MM	Art. no.: 4743.001.00.3
SUSPENSION KIT 1000MM	Art. no.: 4743.919.99.1
DIMMABLE	DALI dimmable On request
POWER CABLE OPTIONS Connected to driver/fixture	Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0
	Wieland GST 18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0
	Wieland T connector GST 18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0



INFORMATION

High quality PMMA diffuser has excellent durability and is more resistant to UV light discolouration

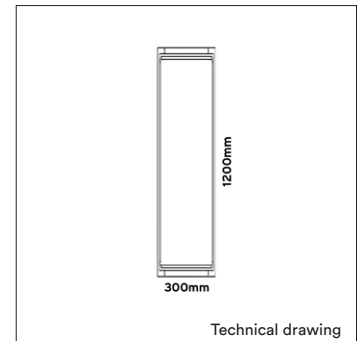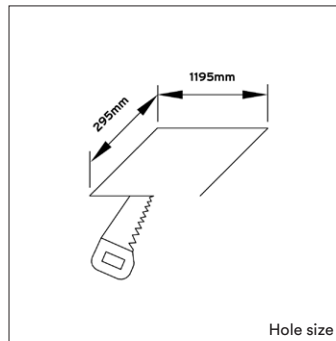

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	LENGTH	TC LIFETIME	mA
4743.301.36.3	Ledline	LEDD	4100lm	36W	114lm/W	3000K	>80	595 X 595mm	50.000 Hrs	900mA
4743.351.36.3	Ledline	LEDD	4100lm	36W	114lm/W	3500K	>80	595 X 595mm	50.000 Hrs	900mA
4743.401.36.3	Ledline	LEDD	4100lm	36W	114lm/W	4000K	>80	595 X 595mm	50.000 Hrs	900mA
4744.301.36.3	Ledline	LEDD	4100lm	36W	114lm/W	3000K	>80	295 X 1195mm	50.000 Hrs	900mA
4744.351.36.3	Ledline	LEDD	4100lm	36W	114lm/W	3500K	>80	295 X 1195mm	50.000 Hrs	900mA
4744.400.36.3	Ledline	LEDD	4100lm	36W	114lm/W	4000K	>80	295 X 1195mm	50.000 Hrs	900mA