



LEDIMO 20

PRODUCT MATERIAL	Die-cast aluminium
ADAPTER	3-phase track adapter
LIGHT SOURCE	Philips SLM G7
MODULE LIFETIME	Approx. 50.000 hours
DRIVER	Including Xitanium driver
COLORS (Δ)	○ 3 = RAL 9003 white ● 5 = RAL 9005 black ● 6 = RAL 9006 alu
BEAM ANGLE	▲ 24°
ADJUSTABLE	Horizontally and vertically rotational
SIZE	231 X 172mm



OPTIONS

OPTIONAL BEAM ANGLE	▲ 12° Art. no.: 3021.012.00.0
	▲ 16° Art. no.: 3021.016.00.0
	▲ 36° Art. no.: 3021.036.00.0
	▲ 50° Art. no.: 3021.050.00.0
DIMMABLE	DALI dimmable
DIFFUSER	Art. no.: 0180.999.99.0
DIFFUSER RING	Art. no.: 0185.999.99.0
BARNDOOR	Art. no.: 3020.500.00.5

INFORMATION


WARRANTY	5 Years
-----------------	---------

Long-life patented LED cooling system

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

This luminaire is also available in 1100lm SLM on request

LEDIMO 20

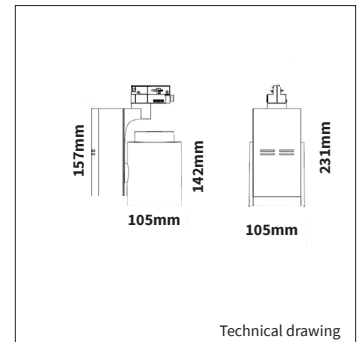

Barndoor

Technical drawing

AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

ARTICLE NUMBER Δ See colors	LUMINOUS FLUX	BRAND	OUTPUT POWER	COLOUR TEMPERATURE	CRI	SETTING	POWER FACTOR
3020. COB* .24.Δ	2000lm	Philips SLM G7	12W	827 / 830 / 835 / 840 / 850	>80	High Efficiency	>0,9
3020. COB* .24.Δ	2000lm	Philips SLM G7	17W	927 / 930	>90	High Efficiency	>0,9
3020. COB* .24.Δ	2000lm	Philips SLM G7	12W	830 Premium White	>80	High Efficiency	>0,9
3020. COB* .24.Δ	2000lm	Philips SLM G7	17W	930 / 935 / 940 Premium White	>90	High Efficiency	>0,9
3020. COB* .24.Δ	2000lm	Philips SLM G7	17W	930 Premium Color	>90	High Efficiency	>0,9
3020. COB* .24.Δ	2000lm	Philips SLM G6	21W	930 Crisp White	>90	High Efficiency	>0,9
3020. COB* .24.Δ	2000lm	Philips SLM G7	22W	925 Food Warm White	84	High Efficiency	>0,9
3020. COB* .24.Δ	2000lm	Philips SLM G7	20W	930 Food Premium Red	88	High Efficiency	>0,9
3020. COB* .24.Δ	3000lm	Philips SLM G7	19W	827 / 830 / 835 / 840 / 850 / 857	>80	High Efficiency	>0,9
3020. COB* .24.Δ	3000lm	Philips SLM G7	23W	927 / 930	>90	High Efficiency	>0,9
3020. COB* .24.Δ	3000lm	Philips SLM G7	20W	830 Premium White	>80	High Efficiency	>0,9
3020. COB* .24.Δ	3000lm	Philips SLM G7	23W	930 / 935 / 940 Premium White	>90	High Efficiency	>0,9
3020. COB* .24.Δ	3000lm	Philips SLM G7	25W	930 Premium Color	>90	High Efficiency	>0,9
3020. COB* .24.Δ	3000lm	Philips SLM G6	32W	930 Crisp White	>90	High Efficiency	>0,9
3020. COB* .24.Δ	3000lm	Philips SLM G7	36W	925 Food Warm White	84	High Efficiency	>0,9
3020. COB* .24.Δ	3000lm	Philips SLM G7	34W	930 Food Premium Red	88	High Efficiency	>0,9
3020. COB* .24.Δ	4500lm	Philips SLM G7	29W	827 / 830 / 835 / 840 / 850 / 857	>80	High Efficiency	>0,9
3020. COB* .24.Δ	4500lm	Philips SLM G7	26W	927 / 930	>90	High Efficiency	>0,9
3020. COB* .24.Δ	4500lm	Philips SLM G7	30W	830 Premium White	>80	High Efficiency	>0,9
3020. COB* .24.Δ	4500lm	Philips SLM G7	35W	930 / 935 / 940 Premium White	>90	High Efficiency	>0,9
3020. COB* .24.Δ	4500lm	Philips SLM G7	37W	930 Premium Color	>90	High Efficiency	>0,9
3020. COB* .24.Δ	4500lm	Philips SLM G6	44W	930 Crisp White	>90	High Efficiency	>0,9
3020. COB* .24.Δ	4500lm	Philips SLM G6	46W	925 Food Warm White	84	High Efficiency	>0,9
3020. COB* .24.Δ	4500lm	Philips SLM G6	46W	930 Food Premium Red	88	High Efficiency	>0,9

High efficiency is the standard Keylight setting for all SLM G6/G7 LED modules. For technical and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.