

PRODUCT MATERIAL	Steel
LIGHT SOURCE	Edison SMD2835 LED
MODULE LIFETIME	Approx. 50.000 hours
DRIVER	Including on/off driver
COLORS	○ 3 = RAL 9003 white
BEAM ANGLE	25° 30° 60° 90° 120°
SIZE	See technical drawing

IP40

CE

UGR <19

5 YEARS WARRANTY


OPTIONS

EMERGENCY BALLAST	Automatic battery status detect 3 hour emergency time 10W LI-battery inside
DIMMABLE	DALI On request
SENSOR	DALI Network sensor module Art. no.: 9210.800.40.3 DALI standalone sensor module Art. no.: 9210.801.40.3




INFORMATION

⚠ Linear trunk with 120° is with Opal diffuser

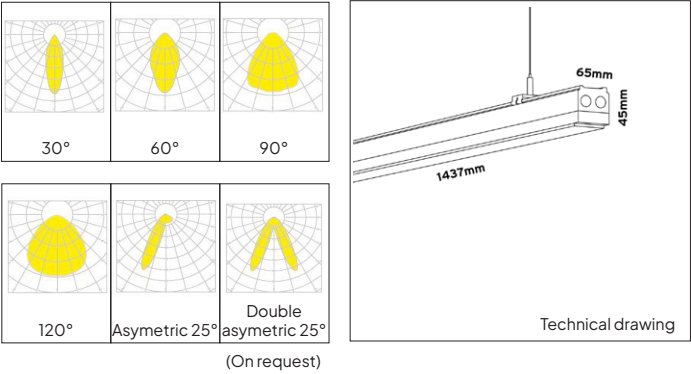


PRODUCT INFORMATION

New generation luminaire for Linear line trunking system improved with higher lumen efficiency. 8 different powers from 25–75W selectable thanks to the dip switch design.


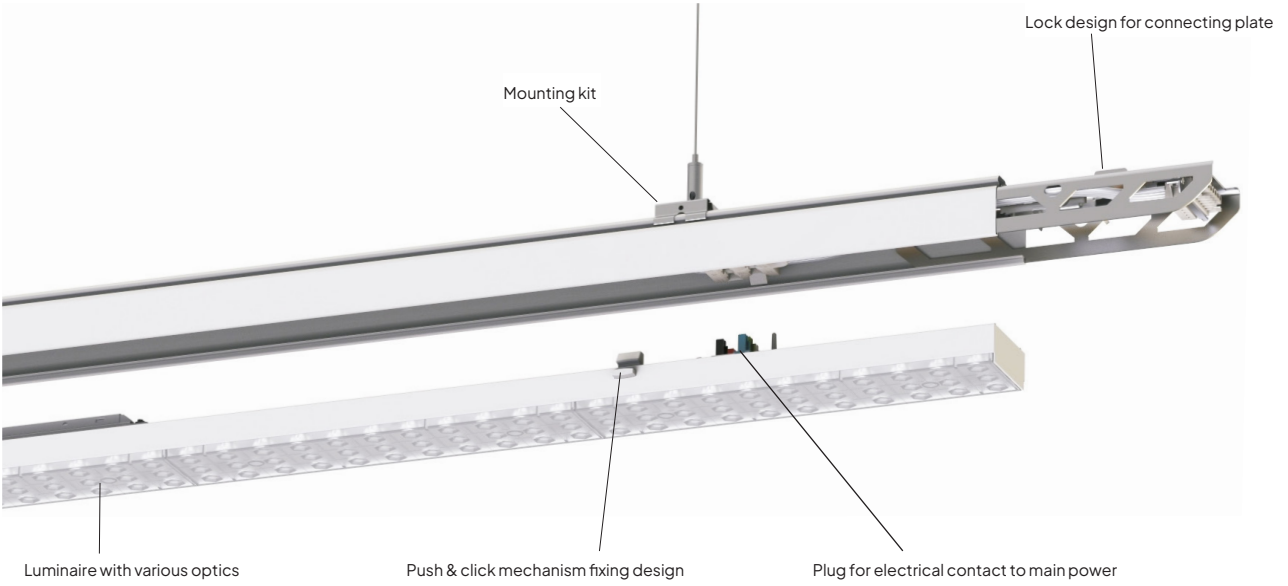




ARTICLE NUMBER	DESCRIPTION	COLOR	LENGTH	WIDTH	HEIGHT
9210.800.99.3	Blind plate cover PC	white	1437mm	45mm	1,5mm
9210.801.00.3	End Box 8 wires	white	255mm	65mm	62mm
9210.802.00.3	Start Box Power Terminal 8 wires	white	255mm	65mm	62mm



ARTICLE NUMBER	DESCRIPTION	COLOR	HEIGHT
9212.004.00.0	Ceiling mounting clamp Every 2m Trunk require 1pc	steel	
9212.005.00.0	Wire Suspension Every 2m Trunk require 1pc	steel	2000mm
9212.006.00.0	Chain suspension Every 2m Trunk require 1pc	steel	2000mm



ARTICLE NUMBER	DESCRIPTION	WIRES	COLOR	LENGTH	WIDTH	HEIGHT
LINEAR TRUNK						
9210.800.01.3	Linear Trunk	8	white	1437mm	65mm	45mm
9210.800.02.3	Linear Trunk	8	white	2874mm	65mm	45mm



ARTICLE NUMBER	DESCRIPTION	LUMEN	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	LENGTH	BEAM ANGLE	TC LIFETIME
LED MODULE									
9210.840.25.3	Linear Trunk LED module	9600lm	60W	160lm/W	4000K	>80	1437mm	25° Asymetric	50.000 Hrs
9210.840.30.3	Linear Trunk LED module	9600lm	60W	160lm/W	4000K	>80	1437mm	30°	50.000 Hrs
9210.840.60.3	Linear Trunk LED module	9600lm	60W	160lm/W	4000K	>80	1437mm	60°	50.000 Hrs
9210.840.90.3	Linear Trunk LED module	9600lm	60W	160lm/W	4000K	>80	1437mm	90°	50.000 Hrs
9210.840.12.3	Linear Trunk LED module	9600lm	60W	160lm/W	4000K	>80	1437mm	120°	50.000 Hrs
9210.860.25.3	Linear Trunk LED module	9600lm	60W	160lm/W	6000K	>80	1437mm	25° Asymetric	50.000 Hrs
9210.860.30.3	Linear Trunk LED module	9600lm	60W	160lm/W	6000K	>80	1437mm	30°	50.000 Hrs
9210.860.60.3	Linear Trunk LED module	9600lm	60W	160lm/W	6000K	>80	1437mm	60°	50.000 Hrs
9210.860.90.3	Linear Trunk LED module	9600lm	60W	160lm/W	6000K	>80	1437mm	90°	50.000 Hrs
9210.860.12.3	Linear Trunk LED module	9600lm	60W	160lm/W	6000K	>80	1437mm	120°	50.000 Hrs

LED MODULE EMERGENCY

9210.840.25.3EM	Linear Trunk LED module	9600lm	60W	160lm/W	4000K	>80	1437mm	25° Asymetric	50.000 Hrs
9210.840.30.3EM	Linear Trunk LED module	9600lm	60W	160lm/W	4000K	>80	1437mm	30°	50.000 Hrs
9210.840.60.3EM	Linear Trunk LED module	9600lm	60W	160lm/W	4000K	>80	1437mm	60°	50.000 Hrs
9210.840.90.3EM	Linear Trunk LED module	9600lm	60W	160lm/W	4000K	>80	1437mm	90°	50.000 Hrs
9210.840.12.3EM	Linear Trunk LED module	9600lm	60W	160lm/W	4000K	>80	1437mm	120°	50.000 Hrs
9210.860.25.3EM	Linear Trunk LED module	9600lm	60W	160lm/W	6000K	>80	1437mm	25° Asymetric	50.000 Hrs
9210.860.30.3EM	Linear Trunk LED module	9600lm	60W	160lm/W	6000K	>80	1437mm	30°	50.000 Hrs
9210.860.60.3EM	Linear Trunk LED module	9600lm	60W	160lm/W	6000K	>80	1437mm	60°	50.000 Hrs
9210.860.90.3EM	Linear Trunk LED module	9600lm	60W	160lm/W	6000K	>80	1437mm	90°	50.000 Hrs
9210.860.12.3EM	Linear Trunk LED module	9600lm	60W	160lm/W	6000K	>80	1437mm	120°	50.000 Hrs