

KEYLIGHT

MAGNET VENUS MICRO


| | |
|-------------------------|--|
| PRODUCT MATERIAL | Die-cast aluminium |
| ADAPTER | 48V adapter |
| LIGHT SOURCE | Bridgelux BXKC |
| MODULE LIFETIME | Approx. 50.000 hours |
| DRIVER | Including DALI driver |
| COLORS (Δ) | ○ 3 = RAL 9003 white ● 5 = RAL 9005 black |
| BEAM ANGLE | ▲ 24° |
| ADJUSTABLE | Yes |
| SIZE | Ø49 X 61mm |



OPTIONS

| | | |
|----------------------------|-------------------------|-------------------------|
| OPTIONAL BEAM ANGLE | ▲ 15° | Art. no.: 5818.020.15.0 |
| | ▲ 36° | Art. no.: 5818.020.36.0 |
| ANTI-GLARE RING | Black | Included |
| | Gold | Art. no.: 5818.030.00.9 |
| HONEYCOMB | Art. no.: 5818.040.00.0 | |
| WIRELESS DIMMABLE | Zigbee or Casambi | |

Design Patent Certificate
No. ZL 2019 3 0427886.1 Trackspot Venus Patent

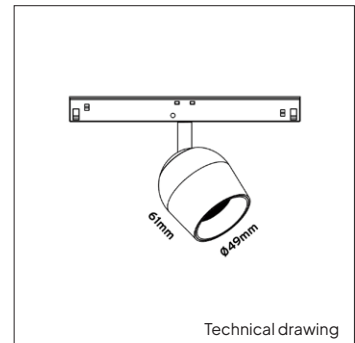

ANTI-GLARE RING



HONEYCOMB



| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|----------------|-----------|-----------|---------------|--------------|-------------------|-------------------|-----|-------------|-------|
| 5818.270.24.Δ | BXKC | Bridgelux | 350lm | 5.5W | 64lm/W | 2700K | >90 | 50.000 Hrs | 500mA |
| 5818.300.24.Δ | BXKC | Bridgelux | 350lm | 5.5W | 64lm/W | 3000K | >90 | 50.000 Hrs | 500mA |

Δ See colors