

<b>PRODUCT MATERIAL</b>	Die-cast aluminium
<b>ADAPTER</b>	48V adapter
<b>LIGHT SOURCE</b>	Bridgelux 3030
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER</b>	Including DALI driver
<b>COLORS</b>	● 5 = RAL 9005 black
<b>BEAM ANGLE</b>	▲ 30°
<b>ADJUSTABLE</b>	No
<b>SIZE</b>	195/291 X 10 X 30mm





## OPTIONS

<b>WIRELESS DIMMABLE</b>	Zigbee or Casambi
--------------------------	-------------------

## INFORMATION

⚠ The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

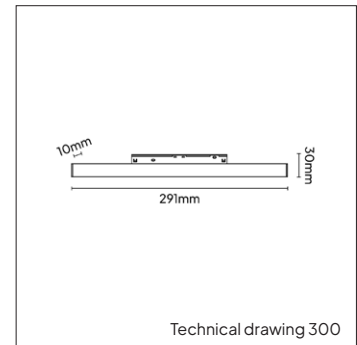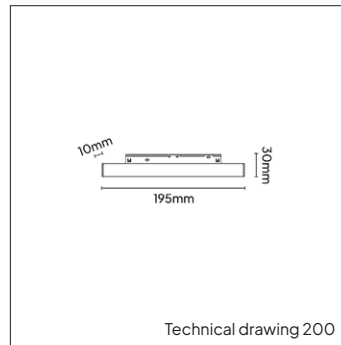

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
<b>SKY 200</b>									
5760.270.30.5	3030	Bridgelux	557lm	10W	56lm/W	2700K	>90	50.000 Hrs	250mA
5760.300.30.5	3030	Bridgelux	557lm	10W	56lm/W	3000K	>90	50.000 Hrs	250mA
<b>SKY 300</b>									
5761.270.30.5	3030	Bridgelux	856lm	15W	57lm/W	2700K	>90	50.000 Hrs	350mA
5761.300.30.5	3030	Bridgelux	856lm	15W	57lm/W	3000K	>90	50.000 Hrs	350mA