

<b>PRODUCT MATERIAL</b>	Die-cast aluminium
<b>LIGHT SOURCE</b>	Bridgelux DtW
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER</b>	Excluding driver, <b>SELECT OPTION</b>
<b>COLORS</b>	○ 3 = RAL 9003 white
<b>BEAM ANGLE</b>	▲120
<b>ADJUSTABLE</b>	No
<b>SIZE</b>	See technical drawing



**OPTIONS**





<b>DRIVER OPTIONS</b>	<b>On/off</b> 500mA 4-12W Art. no.: 0112.500.10.1
	<b>Phase cut</b> 500mA 4-10W Art. no.: 0110.500.20.5
	<b>0/10V</b> 500mA 1-20W Art. no.: 0120.500.30.1 Max. 2 fixtures connected in serie per driver
	<b>DALI2</b> 500mA 4-18W Art. no.: 0118.500.40.3
<b>POWER CABLE OPTIONS</b> Connected to driver/fixture	Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0
	Wieland GST 18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0
	Wieland T connector GST 18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0

**INFORMATION**

Including plaster kit

Always select a driver option and add the selected driver to your order.

⚠ Full warranty only applies when fixture is purchased in combination with recommended driver.

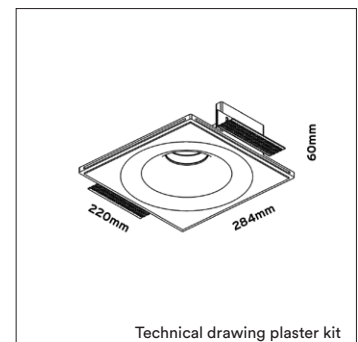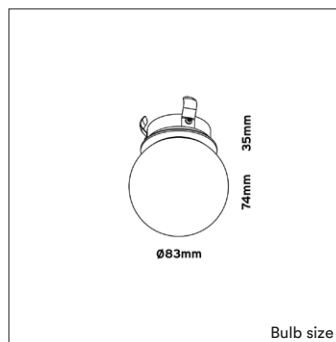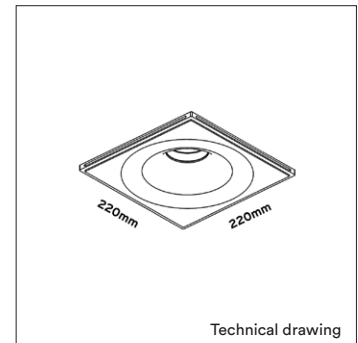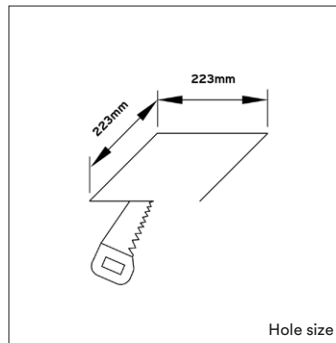

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
4115.125.12.3	DtW	Bridgelux		9.4W	lm/W	1800K-3000K	DTW >90	35.000 Hrs	500mA