




<b>PRODUCT MATERIAL</b>	Steel and aluminium
<b>LIGHT SOURCE</b>	Osram Oslon 3030
<b>MODULE LIFETIME</b>	Approx. 30.000 hours
<b>DRIVER</b>	Including phase cut dimmable driver
<b>COLORS (Δ Inserts)</b>	<ul style="list-style-type: none"> <li>○ 3 = RAL 9003 white</li> <li>● 5 = RAL 9005 black</li> <li>● 8 = Anodic brown</li> <li>● 7 = RAL 7043 anthracite</li> </ul>
<b>BEAM ANGLE</b>	 30°
<b>SIZE</b>	176 X Ø67mm




**OPTIONS**

<b>ON/OFF SWITCH</b>	Art. no.: 6035.000.00.0
<b>DRIVER OPTIONS</b>	<b>DALI</b> 700mA 1-20W Art. no.: 0120.700.40.2

**INFORMATION**

-  Max. hole size for the wall mounting is 40 x 120mm (W X H)
-  Full warranty only applies when fixture is purchased in combination with recommended driver.

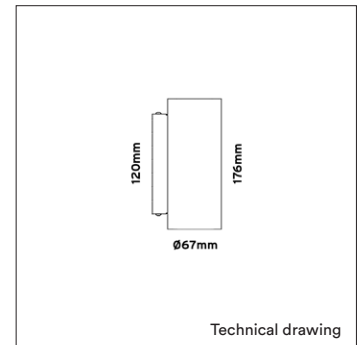

**INSERTS**



ARTICLE NUMBER	COLOR BODY	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
Δ See colors Inserts										
6037.310.30.3Δ	○ white	Oslon 3030	Osram	2 X 150lm	2 X 2,1W	72lm/W	2700K	>90	30.000 Hrs	700mA
6037.310.30.5Δ	● black	Oslon 3030	Osram	2 X 150lm	2 X 2,1W	72lm/W	2700K	>90	30.000 Hrs	700mA
6037.310.30.8Δ	● anodic brown	Oslon 3030	Osram	2 X 150lm	2 X 2,1W	72lm/W	2700K	>90	30.000 Hrs	700mA
6037.310.30.7Δ	● anthracite	Oslon 3030	Osram	2 X 150lm	2 X 2,1W	72lm/W	2700K	>90	30.000 Hrs	700mA
6037.330.30.3Δ	○ white	Oslon 3030	Osram	2 X 161lm	2 X 2,1W	77lm/W	3000K	>90	30.000 Hrs	700mA
6037.330.30.5Δ	● black	Oslon 3030	Osram	2 X 161lm	2 X 2,1W	77lm/W	3000K	>90	30.000 Hrs	700mA
6037.330.30.8Δ	● anodic brown	Oslon 3030	Osram	2 X 161lm	2 X 2,1W	77lm/W	3000K	>90	30.000 Hrs	700mA
6037.330.30.7Δ	● anthracite	Oslon 3030	Osram	2 X 161lm	2 X 2,1W	77lm/W	3000K	>90	30.000 Hrs	700mA