

PRODUCT MATERIAL	Die-cast aluminium and steel
LIGHT SOURCE	LMR50
MODULE LIFETIME	Approx. 30.000 hours
DRIVER	Excluding driver, SELECT OPTION
COLORS (Δ)	☐ 3 = RAL 9003 white ☒ 5 = RAL 9005 black ☐ 6 = RAL 9006 alu
BEAM ANGLE	☒ 20° ☐ 30°
ADJUSTABLE	Yes
SIZE	106 X 106 X 80mm



OPTIONS LMR50


GLASS COVER CLEAR	Glass IP44 Art. no.: 0053.999.99.0
DRIVER OPTIONS	On/off 350mA 6-10W Art. no.: 0110.350.10.3
	Phase cut 350mA 1-7W Art. no.: 0107.350.20.2
	DALI 350mA 3-18W Art. no.: 0118.350.40.0 Max. 2 fixtures connected in serie per driver
POWER CABLE OPTIONS Connected to driver/fixture	Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0
	Wieland GST18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0
	Wieland T connector GST18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0

INFORMATION


Always select a driver option and add the selected driver to your order.



Full warranty only applies when fixture is purchased in combination with recommended driver.



Hole size

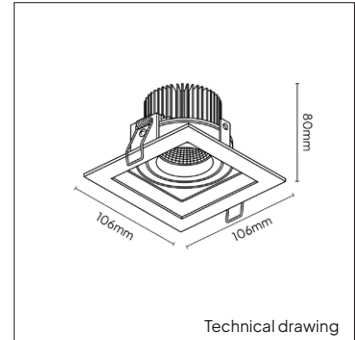

Technical drawing

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	BEAM ANGLE	mA
Δ See colors										
4910.171.20.Δ	LMR50	Bridgelux V6	575lm	6,8W	85lm/W	2700K	>90	30.000 Hrs	20°	350mA
4910.172.30.Δ	LMR50	Bridgelux V6	575lm	6,8W	85lm/W	2700K	>90	30.000 Hrs	30°	350mA
4910.173.20.Δ	LMR50	Bridgelux V6	600lm	6,8W	88lm/W	3000K	>90	30.000 Hrs	20°	350mA
4910.174.30.Δ	LMR50	Bridgelux V6	600lm	6,8W	88lm/W	3000K	>90	30.000 Hrs	30°	350mA
4910.175.20.Δ	LMR50	Bridgelux DtW	535lm	7W	77lm/W	1800-3000K DTW	95	30.000 Hrs	20°	350mA
4910.176.30.Δ	LMR50	Bridgelux DtW	535lm	7W	77lm/W	1800-3000K DTW	95	30.000 Hrs	30°	350mA

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.