



ORBIT 40 LOW UD SR

PRODUCT MATERIAL	Steel and aluminium
LIGHT SOURCE	Philips Ledline
MODULE LIFETIME	Approx. 50.000 hours
DRIVER LEDLINE	Including Philips Xitanium driver SR
COLORS (Δ)	<ul style="list-style-type: none"> ○ 3 = RAL 9003 white ● 5 = RAL 9005 black ● 6 = RAL 9006 alu
DIFFUSER	Opalic white
ADJUSTABLE	No
SIZE	Ø425 X 105mm




SPECIAL FEATURES


Luminaire is equipped with EasyAir Sensor:
 Communication between luminaires without wires
 Easy smartphone commissioning
 Daylight control sensor: Easy Air sensor included
 Movement sensor: Easy Air sensor included
 Dimmable: DALI 2.0 driver included
 Enables gateway data readout
 Xitanium SR interface (based on DALI 2.0)

OPTIONS

COLORS	Available in all RAL colours on request Additional price + 10%
DIMMABLE	Dali dimmable
DIFFUSER	White opalic diffuser in standard Microprismatic UGR<19 option
EMERGENCY	3 hours
IP CLASS	IP20 in standard, IP44 on request
COLOUR RENDERING INDEX	>80 in standard, other on request
MOVEMENT SENSOR	On request
DAYLIGHT CONTROL SENSOR	On request
TUNABLE WHITE	On request
CYAN ENHANCED STATIC	On request

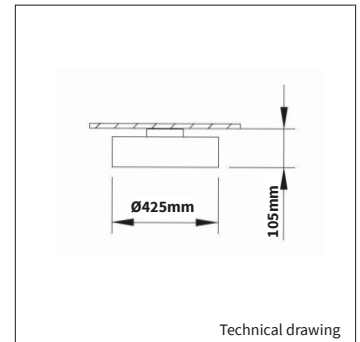

DIFFUSER



INFORMATION

Bespoke size & product features available

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	NETTO LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME
Δ See colors								
5504.430.30.Δ	Ø425mm	4200lm	3600lm	29W	145m/W	3000K	>80	50.000 Hrs
5504.430.35.Δ	Ø425mm	4200lm	3600lm	29W	145m/W	3500K	>80	50.000 Hrs
5504.430.40.Δ	Ø425mm	4200lm	3600lm	29W	145m/W	4000K	>80	50.000 Hrs