



<b>PRODUCT MATERIAL</b>	Aluminium
<b>ADAPTER</b>	3-phase track adapter
<b>LIGHT SOURCE</b>	Bridgelux V10 Array
<b>MODULE LIFETIME</b>	Approx. 30.000 hours
<b>DRIVER</b>	Including phase cut dimmable driver
<b>COLORS (Δ)</b>	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
<b>BEAM ANGLE</b>	▲ 24°
<b>ADJUSTABLE</b>	Horizontally and vertically rotational
<b>SIZE</b>	Ø63 X 250mm




**OPTIONS**

<b>OPTIONAL BEAM ANGLE</b>	▲ 15° Art. no.: 3049.015.00.0
	▲ 35° Art. no.: 3049.035.00.0
<b>ANTI-GLARE RING</b>	Black anti-glare ring Included
	Gold anti-glare ring Art. no.: 3049.999.00.9
<b>HONEYCOMB</b>	Art. no.: 3049.999.94.0
<b>DIFFUSER</b>	Art. no.: 0181.900.99.0

**INFORMATION**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources.

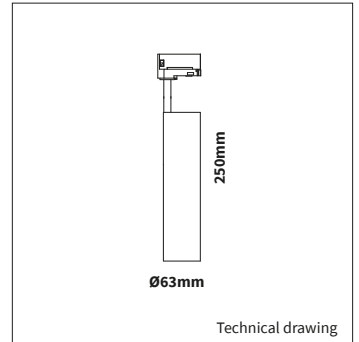

**ANTI-GLARE RING**



**HONEYCOMB**



ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	CCOLOR TEMPERATURE	CRI	TC LIFETIME	mA
3049.995.24.Δ	V10 Array	Bridgelux	950lm	15W	64lm/W	3000K	>90	35.000 Hrs	350mA
3049.996.24.Δ	V10 Array	Bridgelux	950lm	15W	64lm/W	2000 - 3000K	DTW >90	35.000 Hrs	350mA