

PINO CLICK 2




PRODUCT MATERIAL	Die-cast aluminium
LIGHT SOURCE	Bridgelux V8 Array
MODULE LIFETIME	Approx. 35.000 hours
DRIVER	Including phase cut dimmable driver
COLORS (Δ)	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
BEAM ANGLE	26°
ADJUSTABLE	Yes - 0-60° - 360°
SIZE	See technical drawing



OPTIONS

OPTIONAL BEAM ANGLE	36° Art. no.: 4912.010.36.0
ANTI-GLARE RING	Black anti-glare ring Included
	White anti-glare ring Art. no.: 2 X 4912.922.99.3
	Gold anti-glare ring Art. no.: 2 X 4912.922.99.9
GLASS	Prismatic Art. no.: 2 X 4912.933.94.0
	Frosted Art. no.: 2 X 4912.933.90.0
	Striped Art. no.: 2 X 4912.933.96.0
HONEYCOMB	Art. no.: 2 X 4912.933.91.0
DRIVER OPTIONS	Only possible when driver is placed external
	1/10V 500mA 1-20W Art. no.: 0120.500.30.1
	DALI 500mA 1-20W Art. no.: 0120.500.40.1

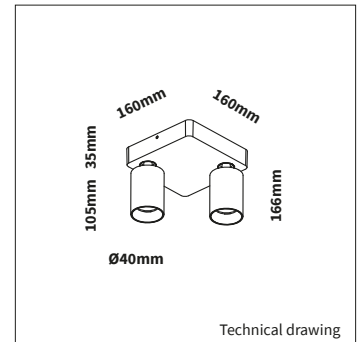

Technical drawing

INFORMATION

Also available in 1 and 3 light round canopy version

Full warranty only applies when fixture is purchased in combination with recommended driver.

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources.

ANTI-GLARE RING



GLASS



HONEYCOMB



ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
Δ See colors									
5032.002.23.Δ	V8 Array	Bridgelux	2 X 740lm	2 X 9W	82lm/W	2700K	>90	35.000 Hrs	500mA