



KEYLIGHT


PINO CLICK 2

PRODUCT MATERIAL	Die-cast aluminium
LIGHT SOURCE	Bridgelux V8 Array
MODULE LIFETIME	Approx. 50.000 hours
DRIVER	Including phase cut dimmable driver
COLORS (Δ)	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
BEAM ANGLE	 23°
ADJUSTABLE	Yes - 0-60° - 360°
SIZE	See technical drawing




OPTIONS

OPTIONAL BEAM ANGLE	 36°	Art. no.: 2 X 4912.010.36.0
ANTI-GLARE RING	Black	Included
	White	Art. no.: 2 X 4912.922.99.3
	Gold	Art. no.: 2 X 4912.922.99.9
GLASS	Prismatic	Art. no.: 2 X 4912.933.94.0
	Frosted	Art. no.: 2 X 4912.933.90.0
	Striped	Art. no.: 2 X 4912.933.96.0
HONEYCOMB	Art. no.: 2 X 4912.933.91.0	
DRIVER OPTIONS	1/10V	500mA 1-20W Art. no.: 0120.500.30.1 This driver can only be placed externally
	DALI	500mA 1-20W Art. no.: 0120.500.40.1 This driver can only be placed externally

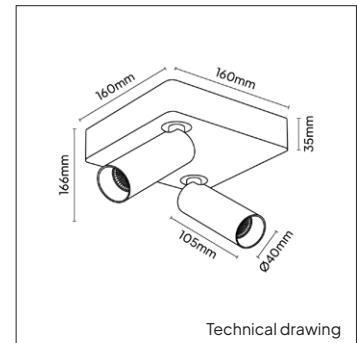

INFORMATION

Also available in 1 and 3 light round canopy version.

 Full warranty only applies when fixture is purchased in combination with recommended driver.

ANTI-GLARE RING



Black

White

Gold

GLASS



Striped

Frosted

Prismatic

HONEYCOMB



Honeycomb

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
5032.002.23.Δ	V8 Array	Bridgelux	2 X 845lm	2 X 9,2W	91lm/W	2700K	>90	50.000 Hrs	500mA

Δ See colors

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.