




# PINO CLICK 3

<b>PRODUCT MATERIAL</b>	Die-cast aluminium
<b>LIGHT SOURCE</b>	Bridgelux V8 Array
<b>MODULE LIFETIME</b>	Approx. 35.000 hours
<b>DRIVER</b>	Including phase cut dimmable driver
<b>COLORS (Δ)</b>	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
<b>BEAM ANGLE</b>	26°
<b>ADJUSTABLE</b>	Yes - 0-60° - 360°
<b>SIZE</b>	See technical drawing



## OPTIONS

<b>OPTIONAL BEAM ANGLE</b>	36° Art. no.: 3 X 4912.010.36.0
<b>ANTI-GLARE RING</b>	Black anti-glare ring <span style="float: right;">Included</span>
	White anti-glare ring Art. no.: 3 X 4912.922.99.3
	Gold anti-glare ring Art. no.: 3 X 4912.922.99.9
<b>GLASS</b>	Prismatic Art. no.: 3 X 4912.933.94.0
	Frosted Art. no.: 3 X 4912.933.90.0
	Striped Art. no.: 3 X 4912.933.96.0
<b>HONEYCOMB</b>	Art. no.: 3 X 4912.933.91.0
<b>DRIVER OPTIONS</b>	Only possible when driver is placed external
	<b>1/10V</b> 500mA 8-29W Art. no.: 0129.500.30.0
	<b>DALI</b> 500mA 7-27W Art. no.: 0125.500.40.0

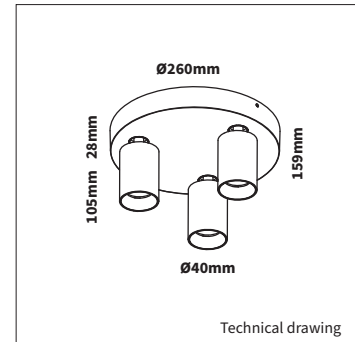

## INFORMATION

Also available in 2 light square canopy and 1 light round canopy version

Full warranty only applies when fixture is purchased in combination with recommended driver.

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.

### ANTI-GLARE RING



Black

White

Gold

### GLASS



Striped

Frosted

Prismatic

### HONEYCOMB



Honeycomb

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
5032.003.23.Δ	V8 Array	Bridgelux	3 X 845m	3 X 9,2W	91lm	2700K	>90	35.000 Hrs	500mA

Δ See colors