




<b>PRODUCT MATERIAL</b>	Die-cast aluminium
<b>LIGHT SOURCE</b>	Bridgelux V8 Array
<b>MODULE LIFETIME</b>	Approx. 35.000 hours
<b>DRIVER</b>	Including phase cut dimmable driver
<b>COLORS (Δ)</b>	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
<b>BEAM ANGLE</b>	23°
<b>ADJUSTABLE</b>	Yes - 0-60° - 360°
<b>SIZE</b>	See technical drawing



**OPTIONS**

<b>OPTIONAL BEAM ANGLE</b>	36° Art. no.: 4912.010.36.0
<b>ANTI-GLARE RING</b>	Black anti-glare ring Included
	White anti-glare ring Art. no.: 4912.922.99.3
	Gold anti-glare ring Art. no.: 4912.922.99.9
<b>GLASS</b>	Prismatic Art. no.: 4912.933.94.0
	Frosted Art. no.: 4912.933.90.0
	Striped Art. no.: 4912.933.96.0
<b>HONEYCOMB</b>	Art. no.: 4912.933.91.0
<b>DRIVER OPTIONS</b>	Only possible when driver is placed external
	<b>1/10V</b> 500mA 7-10W Art. no.: 0110.500.30.2
	<b>DALI</b> 500mA 6-10W Art. no.: 0110.500.40.2

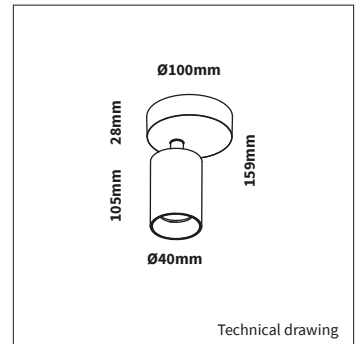

Technical drawing

**INFORMATION**

Also available in 2 light square canopy and 3 light round canopy version

Full warranty only applies when fixture is purchased in combination with recommended driver.

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources.

**ANTI-GLARE RING**



**GLASS**



**HONEYCOMB**



ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
Δ See colors									
5032.001.23.Δ	V8 Array	Bridgelux	845lm	9,2W	91lm/W	2700K	>90	35.000 Hrs	500mA