


PRODUCT MATERIAL	Steel and aluminium
LIGHT SOURCE	Philips LED Module
MODULE LIFETIME	Approx. 30.000 hours
DRIVER	Including on/of driver
COLORS (Δ)	<ul style="list-style-type: none"> ○ 3 = RAL 9003 white ● 5 = RAL 9005 black ● 6 = RAL 9006 alu
BEAM ANGLE	
ADJUSTABLE	No
SIZE	Ø90 X 200mm



OPTIONS

COLORS	Available in all RAL colours on request Additional price + 10%
DIMMABLE	Dali dimmable
SUSPENSION SET	1500mm suspension set on request
COLOUR RENDERING INDEX	>80 in standard, other on request
MOVEMENT SENSOR	On request
DAYLIGHT CONTROL SENSOR	On request
TUNABLE WHITE	On request
CYAN ENHANCED STATIC	On request
WIRELESS DIMMABLE	Masterconnect, Easy Air/Zigbee

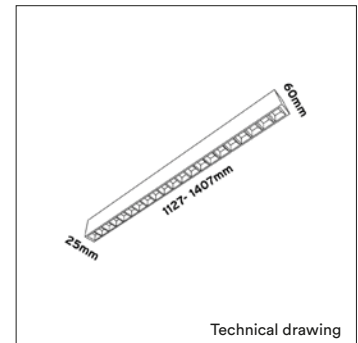

INFORMATION

Nominal lifetime L80/B10 @70.000 h / 25°C

- Bespoke size & product features available
- The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
1127MM						
Δ See colors						
55.01605.83.E.30.LNS. Δ	30°	4400lm	26W	169lm/W	3000K	>80
55.01605.81.E.30.LNS. Δ	30°	4400lm	26W	169lm/W	3500K	>80
55.01605.84.E.30.LNS. Δ	30°	4400lm	26W	169lm/W	4000K	>80
55.01605.83.E.55.LNS. Δ	55°	4400lm	26W	169lm/W	3000K	>80
55.01605.81.E.55.LNS. Δ	55°	4400lm	26W	169lm/W	3500K	>80
55.01605.84.E.55.LNS. Δ	55°	4400lm	26W	169lm/W	4000K	>80
55.01605.83.E.65.LNS. Δ	65°	4400lm	26W	169lm/W	3000K	>80
55.01605.81.E.65.LNS. Δ	65°	4400lm	26W	169lm/W	3500K	>80
55.01605.84.E.65.LNS. Δ	65°	4400lm	26W	169lm/W	4000K	>80
1407MM						
55.01606.83.E.30.LNS. Δ	30°	5500lm	33W	166lm/W	3000K	>80
55.01606.81.E.30.LNS. Δ	30°	5500lm	33W	166lm/W	3500K	>80
55.01606.84.E.30.LNS. Δ	30°	5500lm	33W	166lm/W	4000K	>80
55.01606.83.E.55.LNS. Δ	55°	5500lm	33W	166lm/W	3000K	>80
55.01606.81.E.55.LNS. Δ	55°	5500lm	33W	166lm/W	3500K	>80
55.01606.84.E.55.LNS. Δ	55°	5500lm	33W	166lm/W	4000K	>80
55.01606.83.E.65.LNS. Δ	65°	5500lm	33W	166lm/W	3000K	>80
55.01606.81.E.65.LNS. Δ	65°	5500lm	33W	166lm/W	3500K	>80
55.01606.84.E.65.LNS. Δ	65°	5500lm	33W	166lm/W	4000K	>80