

<b>PRODUCT MATERIAL</b>	Aluminium profile
<b>LIGHT SOURCE</b>	Philips Fortimo
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER</b>	Including DALI 2.0 driver
<b>COLORS (Δ)</b>	<ul style="list-style-type: none"> <li>○ 3 = RAL 9003 white</li> <li>● 5 = RAL 9005 black</li> <li>● 6 = RAL 9006 alu</li> </ul>
<b>REFLECTOR</b>	Aluminium white
<b>SIZE</b>	Different sizes available




## SPECIAL FEATURES

Luminaire is equipped with EasyAir Sensor:  
 Communication between luminaires without wires.  
 Easy smartphone commissioning  
 Daylight control sensor: EasyAir sensor included  
 Movement sensor: Easy Airsensor included  
 Dimmable: DALI 2.0 driver included  
 Enables gateway data readout  
 Xitanium SR interface (based on DALI 2.0)


## OPTIONS

<b>COLORS</b>	Available in all RAL colours on request Additional price + 10%
<b>SUSPENSION SET</b>	Suspension set 1500mm included
<b>DIFFUSER</b>	White opalic diffuser or Microprismatic UGR<19 option
<b>EMERGENCY</b>	3 hours
<b>IP CLASS</b>	IP20 in standard, IP44 on request
<b>COLOUR RENDERING INDEX</b>	>80 in standard, other on request
<b>MOVEMENT SENSOR</b>	EasyAir sensor included
<b>DAYLIGHT CONTROL SENSOR</b>	EasyAir sensor included
<b>TUNABLE WHITE</b>	On request
<b>CYAN ENHANCED STATIC</b>	On request

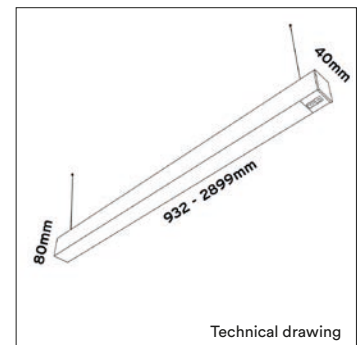

Technical drawing

### DIFFUSER



## INFORMATION

**Nominal lifetime L80/B10 @70.000 h / 25°C**

Luminaires can be connected into long lighting lines



**Bespoke size & product features available**



**The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.**

ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
<b>SINGLE PROFILES UP/DN OPAL</b>						
Δ See colors						
55.01120.83.XC.OP.Δ	932mm	5500lm	33W	167lm/W	3000K	>80
55.01120.81.XC.OP.Δ	932mm	5500lm	33W	167lm/W	3500K	>80
55.01120.84.XC.OP.Δ	932mm	5500lm	33W	167lm/W	4000K	>80
55.01121.83.XC.OP.Δ	1213mm	7700lm	46W	167lm/W	3000K	>80
55.01121.81.XC.OP.Δ	1213mm	7700lm	46W	167lm/W	3500K	>80
55.01121.84.XC.OP.Δ	1213mm	7700lm	46W	167lm/W	4000K	>80
55.01122.83.XC.OP.Δ	1494mm	9900lm	58W	171lm/W	3000K	>80
55.01122.81.XC.OP.Δ	1494mm	9900lm	58W	171lm/W	3500K	>80
55.01122.84.XC.OP.Δ	1494mm	9900lm	58W	171lm/W	4000K	>80
55.01123.83.XC.OP.Δ	1775mm	12100lm	72W	168lm/W	3000K	>80
55.01123.81.XC.OP.Δ	1775mm	12100lm	72W	168lm/W	3500K	>80
55.01123.84.XC.OP.Δ	1775mm	12100lm	72W	168lm/W	4000K	>80
55.01124.83.XC.OP.Δ	2056mm	14300lm	85W	168lm/W	3000K	>80
55.01124.81.XC.OP.Δ	2056mm	14300lm	85W	168lm/W	3500K	>80
55.01124.84.XC.OP.Δ	2056mm	14300lm	85W	168lm/W	4000K	>80
55.01125.83.XC.OP.Δ	2337mm	16500lm	98W	168lm/W	3000K	>80
55.01125.81.XC.OP.Δ	2337mm	16500lm	98W	168lm/W	3500K	>80
55.01125.84.XC.OP.Δ	2337mm	16500lm	98W	168lm/W	4000K	>80
55.01126.83.XC.OP.Δ	2618mm	18700lm	110W	170lm/W	3000K	>80
55.01126.81.XC.OP.Δ	2618mm	18700lm	110W	170lm/W	3500K	>80
55.01126.84.XC.OP.Δ	2618mm	18700lm	110W	170lm/W	4000K	>80
55.01127.83.XC.OP.Δ	2899mm	20900lm	124W	169lm/W	3000K	>80
55.01127.81.XC.OP.Δ	2899mm	20900lm	124W	170lm/W	3500K	>80
55.01127.84.XC.OP.Δ	2899mm	20900lm	124W	170lm/W	4000K	>80

ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
<b>SINGLE PROFILES UP/DN UGR&lt;19</b>						
Δ See colors						
55.01120.83.XC.MP19.Δ	932mm	5500lm	33W	167lm/W	3000K	>80
55.01120.81.XC.MP19.Δ	932mm	5500lm	33W	167lm/W	3500K	>80
55.01120.84.XC.MP19.Δ	932mm	5500lm	33W	167lm/W	4000K	>80
55.01121.83.XC.MP19.Δ	1213mm	7700lm	46W	167lm/W	3000K	>80
55.01121.81.XC.MP19.Δ	1213mm	7700lm	46W	167lm/W	3500K	>80
55.01121.84.XC.MP19.Δ	1213mm	7700lm	46W	167lm/W	4000K	>80
55.01122.83.XC.MP19.Δ	1494mm	9900lm	58W	171lm/W	3000K	>80
55.01122.81.XC.MP19.Δ	1494mm	9900lm	58W	171lm/W	3500K	>80
55.01122.84.XC.MP19.Δ	1494mm	9900lm	58W	171lm/W	4000K	>80
55.01123.83.XC.MP19.Δ	1775mm	12100lm	72W	168lm/W	3000K	>80
55.01123.81.XC.MP19.Δ	1775mm	12100lm	72W	168lm/W	3500K	>80
55.01123.84.XC.MP19.Δ	1775mm	12100lm	72W	168lm/W	4000K	>80
55.01124.83.XC.MP19.Δ	2056mm	14300lm	85W	168lm/W	3000K	>80
55.01124.81.XC.MP19.Δ	2056mm	14300lm	85W	168lm/W	3500K	>80
55.01124.84.XC.MP19.Δ	2056mm	14300lm	85W	168lm/W	4000K	>80
55.01125.83.XC.MP19.Δ	2337mm	16500lm	98W	168lm/W	3000K	>80
55.01125.81.XC.MP19.Δ	2337mm	16500lm	98W	168lm/W	3500K	>80
55.01125.84.XC.MP19.Δ	2337mm	16500lm	98W	168lm/W	4000K	>80
55.01126.83.XC.MP19.Δ	2618mm	18700lm	110W	170lm/W	3000K	>80
55.01126.81.XC.MP19.Δ	2618mm	18700lm	110W	170lm/W	3500K	>80
55.01126.84.XC.MP19.Δ	2618mm	18700lm	110W	170lm/W	4000K	>80
55.01127.83.XC.MP19.Δ	2899mm	20900lm	124W	169lm/W	3000K	>80
55.01127.81.XC.MP19.Δ	2899mm	20900lm	124W	169lm/W	3500K	>80
55.01127.84.XC.MP19.Δ	2899mm	20900lm	124W	169lm/W	4000K	>80