


PRODUCT MATERIAL	Aluminium profile
LIGHT SOURCE	Philips Fortimo
MODULE LIFETIME	Approx. 50.000 hours
DRIVER	Including driver
COLORS (Δ)	<input type="radio"/> 3 = RAL 9003 white <input checked="" type="radio"/> 5 = RAL 9005 black <input type="radio"/> 6 = RAL 9006 alu
REFLECTOR	Aluminium white
SIZE	Different sizes available

OPTIONS

COLORS	Available in all RAL colours on request Additional price + 10%
SUSPENSION SET	1500mm suspension set included
DIMMABLE	Dali dimmable
DIFFUSER	White opalic diffuser or Microprismatic UGR<19 option
EMERGENCY	3 hours
IP CLASS	IP20 in standard, IP44 on request
COLOUR RENDERING INDEX	>80 in standard, other on request
MOVEMENT SENSOR	On request
DAYLIGHT CONTROL SENSOR	On request
TUNABLE WHITE	On request
CYAN ENHANCED STATIC	On request
WIRELESS DIMMABLE	Masterconnect, Easy Air/Zigbee

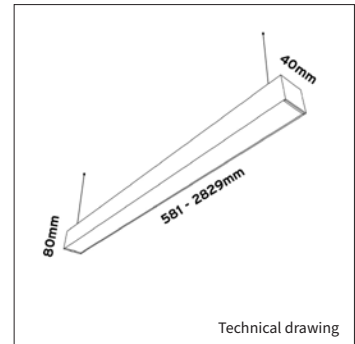

INFORMATION


Nominal lifetime 70.000/L80B10

Luminaires can be connected into long lighting lines

Bespoke size & product features available

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

DIFFUSER



ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
SINGLE PROFILES UP/DN OPAL						
Δ See colors						
55.00059.83.E.OP.Δ	581mm	3300lm	20W	165lm/W	3000K	>80
55.00059.81.E.OP.Δ	581mm	3300lm	20W	165lm/W	3500K	>80
55.00059.84.E.OP.Δ	581mm	3300lm	20W	165lm/W	4000K	>80
55.00060.83.E.OP.Δ	862mm	5500lm	33W	167lm/W	3000K	>80
55.00060.81.E.OP.Δ	862mm	5500lm	33W	167lm/W	3500K	>80
55.00060.84.E.OP.Δ	862mm	5500lm	33W	167lm/W	4000K	>80
55.00061.83.E.OP.Δ	1143mm	7700lm	46W	167lm/W	3000K	>80
55.00061.81.E.OP.Δ	1143mm	7700lm	46W	167lm/W	3500K	>80
55.00061.84.E.OP.Δ	1143mm	7700lm	46W	167lm/W	4000K	>80
55.00062.83.E.OP.Δ	1424mm	9900lm	58W	171lm/W	3000K	>80
55.00062.81.E.OP.Δ	1424mm	9900lm	58W	171lm/W	3500K	>80
55.00062.84.E.OP.Δ	1424mm	9900lm	58W	171lm/W	4000K	>80
55.00063.83.E.OP.Δ	1705mm	12100lm	72W	168lm/W	3000K	>80
55.00063.81.E.OP.Δ	1705mm	12100lm	72W	168lm/W	3500K	>80
55.00063.84.E.OP.Δ	1705mm	12100lm	72W	168lm/W	4000K	>80
55.00064.83.E.OP.Δ	1986mm	14300lm	85W	168lm/W	3000K	>80
55.00064.81.E.OP.Δ	1986mm	14300lm	85W	168lm/W	3500K	>80
55.00064.84.E.OP.Δ	1986mm	14300lm	85W	168lm/W	4000K	>80
55.00065.83.E.OP.Δ	2267mm	16500lm	98W	168lm/W	3000K	>80
55.00065.81.E.OP.Δ	2267mm	16500lm	98W	168lm/W	3500K	>80
55.00065.84.E.OP.Δ	2267mm	16500lm	98W	168lm/W	4000K	>80
55.00066.83.E.OP.Δ	2548mm	18700lm	110W	170lm/W	3000K	>80
55.00066.81.E.OP.Δ	2548mm	18700lm	110W	170lm/W	3500K	>80
55.00066.84.E.OP.Δ	2548mm	18700lm	110W	170lm/W	4000K	>80
55.00067.83.E.OP.Δ	2829mm	20900lm	124W	169lm/W	3000K	>80
55.00067.81.E.OP.Δ	2829mm	20900lm	124W	170lm/W	3500K	>80
55.00067.84.E.OP.Δ	2829mm	20900lm	124W	170lm/W	4000K	>80

ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
SINGLE PROFILES UP/DN UGR<19						
Δ See colors						
55.00059.83.E.MP19.Δ	581mm	3300lm	20W	165lm/W	3000K	>80
55.00059.81.E.MP19.Δ	581mm	3300lm	20W	165lm/W	3500K	>80
55.00059.84.E.MP19.Δ	581mm	3300lm	20W	165lm/W	4000K	>80
55.00060.83.E.MP19.Δ	862mm	5500lm	33W	167lm/W	3000K	>80
55.00060.81.E.MP19.Δ	862mm	5500lm	33W	167lm/W	3500K	>80
55.00060.84.E.MP19.Δ	862mm	5500lm	33W	167lm/W	4000K	>80
55.00061.83.E.MP19.Δ	1143mm	7700lm	46W	167lm/W	3000K	>80
55.00061.81.E.MP19.Δ	1143mm	7700lm	46W	167lm/W	3500K	>80
55.00061.84.E.MP19.Δ	1143mm	7700lm	46W	167lm/W	4000K	>80
55.00062.83.E.MP19.Δ	1424mm	9900lm	58W	171lm/W	3000K	>80
55.00062.81.E.MP19.Δ	1424mm	9900lm	58W	171lm/W	3500K	>80
55.00062.84.E.MP19.Δ	1424mm	9900lm	58W	171lm/W	4000K	>80
55.00063.83.E.MP19.Δ	1705mm	12100lm	72W	168lm/W	3000K	>80
55.00063.81.E.MP19.Δ	1705mm	12100lm	72W	168lm/W	3500K	>80
55.00063.84.E.MP19.Δ	1705mm	12100lm	72W	168lm/W	4000K	>80
55.00064.83.E.MP19.Δ	1986mm	14300lm	85W	168lm/W	3000K	>80
55.00064.81.E.MP19.Δ	1986mm	14300lm	85W	168lm/W	3500K	>80
55.00064.84.E.MP19.Δ	1986mm	14300lm	85W	168lm/W	4000K	>80
55.00065.83.E.MP19.Δ	2267mm	16500lm	98W	168lm/W	3000K	>80
55.00065.81.E.MP19.Δ	2267mm	16500lm	98W	168lm/W	3500K	>80
55.00065.84.E.MP19.Δ	2267mm	16500lm	98W	168lm/W	4000K	>80
55.00066.83.E.MP19.Δ	2548mm	18700lm	110W	170lm/W	3000K	>80
55.00066.81.E.MP19.Δ	2548mm	18700lm	110W	170lm/W	3500K	>80
55.00066.84.E.MP19.Δ	2548mm	18700lm	110W	170lm/W	4000K	>80
55.00067.83.E.MP19.Δ	2829mm	20900lm	124W	169lm/W	3000K	>80
55.00067.81.E.MP19.Δ	2829mm	20900lm	124W	169lm/W	3500K	>80
55.00067.84.E.MP19.Δ	2829mm	20900lm	124W	169lm/W	4000K	>80