



<b>PRODUCT MATERIAL</b>	Aluminium profile
<b>LIGHT SOURCE</b>	Philips Fortimo
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER</b>	Including on/off driver
<b>COLORS (Δ)</b>	<ul style="list-style-type: none"> <li>○ 3 = RAL 9003 white</li> <li>● 5 = RAL 9005 black</li> <li>● 6 = RAL 9006 alu</li> </ul>
<b>REFLECTOR</b>	Aluminium white
<b>SIZE</b>	Different sizes available

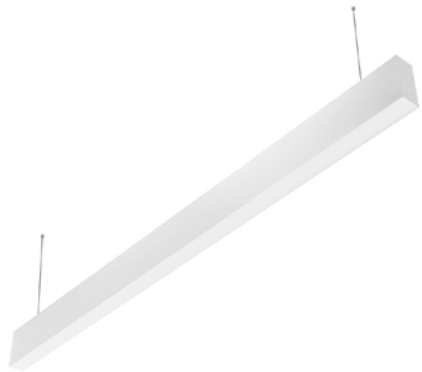

## OPTIONS

<b>COLORS</b>	Available in all RAL colours on request Additional price + 10%
<b>SUSPENSION SET</b>	1500mm suspension set included
<b>DIMMABLE</b>	Dali dimmable
<b>DIFFUSER</b>	White opalic diffuser (OP) or Microprismatic UGR<19 (MP19) see pricelist
<b>EMERGENCY</b>	3 hours
<b>IP CLASS</b>	IP20 in standard, IP44 on request
<b>COLOUR RENDERING INDEX</b>	>80 in standard, other on request
<b>MOVEMENT SENSOR</b>	On request
<b>DAYLIGHT CONTROL SENSOR</b>	On request
<b>TUNABLE WHITE</b>	On request
<b>CYAN ENHANCED STATIC</b>	On request
<b>WIRELESS DIMMABLE</b>	Masterconnect, Easy Air/Zigbee

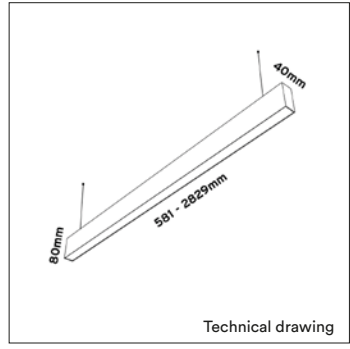




## INFORMATION

Nominal lifetime L80/B10 @70.000 h / 25°C

Luminaires can be connected into long lighting lines

- ⚠ **Bespoke size & product features available**
- ⚠ **The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.**


### DIFFUSER

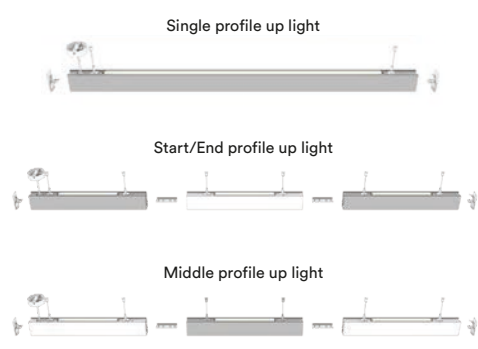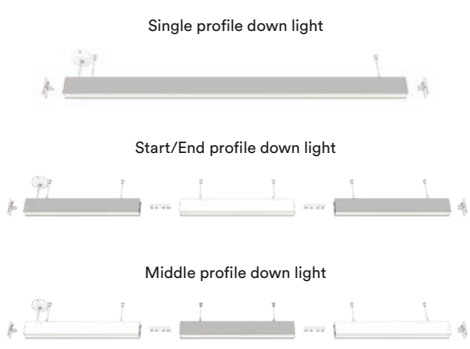


ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
<b>SINGLE PROFILE OPAL (UGR&lt;19 SEE PRICELIST)</b>						
Δ See colors						
55.00059.83.E.OP.Δ	581mm	3300lm	20W	165lm/W	3000K	>80
55.00059.81.E.OP.Δ	581mm	3300lm	20W	165lm/W	3500K	>80
55.00059.84.E.OP.Δ	581mm	3300lm	20W	165lm/W	4000K	>80
55.00060.83.E.OP.Δ	862mm	5500lm	33W	167lm/W	3000K	>80
55.00060.81.E.OP.Δ	862mm	5500lm	33W	167lm/W	3500K	>80
55.00060.84.E.OP.Δ	862mm	5500lm	33W	167lm/W	4000K	>80
55.00061.83.E.OP.Δ	1143mm	7700lm	46W	167lm/W	3000K	>80
55.00061.81.E.OP.Δ	1143mm	7700lm	46W	167lm/W	3500K	>80
55.00061.84.E.OP.Δ	1143mm	7700lm	46W	167lm/W	4000K	>80
55.00062.83.E.OP.Δ	1424mm	9900lm	58W	171lm/W	3000K	>80
55.00062.81.E.OP.Δ	1424mm	9900lm	58W	171lm/W	3500K	>80
55.00062.84.E.OP.Δ	1424mm	9900lm	58W	171lm/W	4000K	>80
55.00063.83.E.OP.Δ	1705mm	12100lm	72W	168lm/W	3000K	>80
55.00063.81.E.OP.Δ	1705mm	12100lm	72W	168lm/W	3500K	>80
55.00063.84.E.OP.Δ	1705mm	12100lm	72W	168lm/W	4000K	>80
55.00064.83.E.OP.Δ	1986mm	14300lm	85W	168lm/W	3000K	>80
55.00064.81.E.OP.Δ	1986mm	14300lm	85W	168lm/W	3500K	>80
55.00064.84.E.OP.Δ	1986mm	14300lm	85W	168lm/W	4000K	>80
55.00065.83.E.OP.Δ	2267mm	16500lm	98W	168lm/W	3000K	>80
55.00065.81.E.OP.Δ	2267mm	16500lm	98W	168lm/W	3500K	>80
55.00065.84.E.OP.Δ	2267mm	16500lm	98W	168lm/W	4000K	>80
55.00066.83.E.OP.Δ	2548mm	18700lm	110W	170lm/W	3000K	>80
55.00066.81.E.OP.Δ	2548mm	18700lm	110W	170lm/W	3500K	>80
55.00066.84.E.OP.Δ	2548mm	18700lm	110W	170lm/W	4000K	>80
55.00067.83.E.OP.Δ	2829mm	20900lm	124W	169lm/W	3000K	>80
55.00067.81.E.OP.Δ	2829mm	20900lm	124W	170lm/W	3500K	>80
55.00067.84.E.OP.Δ	2829mm	20900lm	124W	170lm/WV	4000K	>80

ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
<b>START/END PROFILE OPAL (UGR&lt;19 SEE PRICELIST)</b>						
Δ See colors						
55.00090.83.E.OP.Δ	572mm	3300lm	20W	165lm/W	3000K	>80
55.00090.81.E.OP.Δ	572mm	3300lm	20W	165lm/W	3500K	>80
55.00090.84.E.OP.Δ	572mm	3300lm	20W	165lm/W	4000K	>80
55.00091.83.E.OP.Δ	853mm	5500lm	33W	167lm/W	3000K	>80
55.00091.81.E.OP.Δ	853mm	5500lm	33W	167lm/W	3500K	>80
55.00091.84.E.OP.Δ	853mm	5500lm	33W	167lm/W	4000K	>80
55.00092.83.E.OP.Δ	1134mm	7700lm	46W	167lm/W	3000K	>80
55.00092.81.E.OP.Δ	1134mm	7700lm	46W	167lm/W	3500K	>80
55.00092.84.E.OP.Δ	1134mm	7700lm	46W	167lm/W	4000K	>80
55.00093.83.E.OP.Δ	1415mm	9900lm	58W	171lm/W	3000K	>80
55.00093.81.E.OP.Δ	1415mm	9900lm	58W	171lm/W	3500K	>80
55.00093.84.E.OP.Δ	1415mm	9900lm	58W	171lm/W	4000K	>80
55.00094.83.E.OP.Δ	1696mm	12100lm	72W	168lm/W	3000K	>80
55.00094.81.E.OP.Δ	1696mm	12100lm	72W	168lm/W	3500K	>80
55.00094.84.E.OP.Δ	1696mm	12100lm	72W	168lm/W	4000K	>80
55.00095.83.E.OP.Δ	1977mm	14300lm	85W	168lm/W	3000K	>80
55.00095.81.E.OP.Δ	1977mm	14300lm	85W	168lm/W	3500K	>80
55.00095.84.E.OP.Δ	1977mm	14300lm	85W	168lm/W	4000K	>80
55.00096.83.E.OP.Δ	2258mm	16500lm	98W	168lm/W	3000K	>80
55.00096.81.E.OP.Δ	2258mm	16500lm	98W	168lm/W	3500K	>80
55.00096.84.E.OP.Δ	2258mm	16500lm	98W	168lm/W	4000K	>80
55.00097.83.E.OP.Δ	2539mm	18700lm	110W	170lm/W	3000K	>80
55.00097.81.E.OP.Δ	2539mm	18700lm	110W	170lm/W	3500K	>80
55.00097.84.E.OP.Δ	2539mm	18700lm	110W	170lm/W	4000K	>80
55.00098.83.E.OP.Δ	2820mm	20900lm	124W	169lm/W	3000K	>80
55.00098.81.E.OP.Δ	2820mm	20900lm	124W	169lm/W	3500K	>80
55.00098.84.E.OP.Δ	2820mm	20900lm	124W	169lm/W	4000K	>80


ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
<b>MIDDLE PROFILE OPAL (UGR&lt;19 SEE PRICELIST)</b>						
Δ See colors						
55.00690.83.E.OP.Δ	1124mm	7700lm	46W	167lm/W	3000K	>80
55.00690.81.E.OP.Δ	1124mm	7700lm	46W	167lm/W	3500K	>80
55.00690.84.E.OP.Δ	1124mm	7700lm	46W	167lm/W	4000K	>80
55.00691.83.E.OP.Δ	1405mm	9900lm	58W	171lm/W	3000K	>80
55.00691.81.E.OP.Δ	1405mm	9900lm	58W	171lm/W	3500K	>80
55.00691.84.E.OP.Δ	1405mm	9900lm	58W	171lm/W	4000K	>80
55.00692.83.E.OP.Δ	1686mm	12100lm	72W	168lm/W	3000K	>80
55.00692.81.E.OP.Δ	1686mm	12100lm	72W	168lm/W	3500K	>80
55.00692.84.E.OP.Δ	1686mm	12100lm	72W	168lm/W	4000K	>80
55.00100.83.E.OP.Δ	1967mm	14300lm	85W	168lm/W	3000K	>80
55.00100.81.E.OP.Δ	1967mm	14300lm	85W	168lm/W	3500K	>80
55.00100.84.E.OP.Δ	1967mm	14300lm	85W	168lm/W	4000K	>80
55.00101.83.E.OP.Δ	2248mm	16500lm	98W	168lm/W	3000K	>80
55.00101.81.E.OP.Δ	2248mm	16500lm	98W	168lm/W	3500K	>80
55.00101.84.E.OP.Δ	2248mm	16500lm	98W	168lm/W	4000K	>80
55.00102.83.E.OP.Δ	2529mm	18700lm	110W	170lm/W	3000K	>80
55.00102.81.E.OP.Δ	2529mm	18700lm	110W	170lm/W	3500K	>80
55.00102.84.E.OP.Δ	2529mm	18700lm	110W	170lm/W	4000K	>80
55.00103.83.E.OP.Δ	2810mm	20900lm	124W	169lm/W	3000K	>80
55.00103.81.E.OP.Δ	2810mm	20900lm	124W	169lm/W	3500K	>80
55.00103.84.E.OP.Δ	2810mm	20900lm	124W	169lm/W	4000K	>80



ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
<b>L PROFILE OPAL (UGR&lt;19 SEE PRICELIST)</b>						
Δ See colors						
55.00122.83.E.OP.Δ	592mm	6600lm	39W	169lm/W	3000K	>80
55.00122.81.E.OP.Δ	592mm	6600lm	39W	169lm/W	3500K	>80
55.00122.84.E.OP.Δ	592mm	6600lm	39W	169lm/W	4000K	>80



ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
<b>T PROFILE OPAL (UGR&lt;19 SEE PRICELIST)</b>						
Δ See colors						
55.00123.83.E.OP.Δ	1144mm	9900lm	58W	171lm/W	3000K	>80
55.00123.81.E.OP.Δ	1144mm	9900lm	58W	171lm/W	3500K	>80
55.00123.84.E.OP.Δ	1144mm	9900lm	58W	171lm/W	4000K	>80



ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
<b>X PROFILE OPAL (UGR&lt;19 SEE PRICELIST)</b>						
Δ See colors						
55.00124.83.E.OP.Δ	1144mm	13200lm	78W	169lm/W	3000K	>80
55.00124.81.E.OP.Δ	1144mm	13200lm	78W	169lm/W	3500K	>80
55.00124.84.E.OP.Δ	1144mm	13200lm	78W	169lm/W	4000K	>80

ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
<b>EMPTY PROFILE WITH ALU COVER</b>						
Δ See colors						
55.00118.100.Δ	1000mm	-	-	-	-	-

**ACCESSOIRES**

All accessories such as end caps, linear connectors, quick connectors for system profiles, suspension wires or power cables should be ordered separately both for standalone profiles or lighting systems

Option suspension , also available in 3m (See pricelist)



Suspension

Steel wire 1,5m

Art. no.: 90.00110.15.Δ



3 Core power cable

Transparent 1,5m

Art. no.: 90.00101.15.Δ



5 Core power cable

Transparent 1,5m

Art. no.: 90.00102.15.Δ



End cap

Art. no.: 90.00107.Δ



Linear connector

Art. no.: 90.00103



3 Pole quick connector

Male and female

Art. no.: 90.00112.MF



5 Pole quick connector

Male and female

Art. no.: 90.00113.MF