


PRODUCT MATERIAL	Aluminium profile
LIGHT SOURCE	Philips Fortimo
MODULE LIFETIME	Approx. 50.000 hours
DRIVER	Including driver
COLORS (Δ)	<ul style="list-style-type: none"> ○ 3 = RAL 9003 white ● 5 = RAL 9005 black ● 6 = RAL 9006 alu
REFLECTOR	Aluminium white
SIZE	Different sizes available

OPTIONS

COLORS	Available in all RAL colours on request Additional price + 10%
SUSPENSION SET	1500mm suspension set
DIMMABLE	Dali dimmable
DIFFUSER	White opalic diffuser or Microprismatic UGR<19 option
EMERGENCY	3 hours
IP CLASS	IP20 in standard, IP44 on request
COLOUR RENDERING INDEX	>80 in standard, other on request
MOVEMENT SENSOR	On request
DAYLIGHT CONTROL SENSOR	On request
TUNABLE WHITE	On request
CYAN ENHANCED STATIC	On request
WIRELESS DIMMABLE	Masterconnect, Easy Air/Zigbee

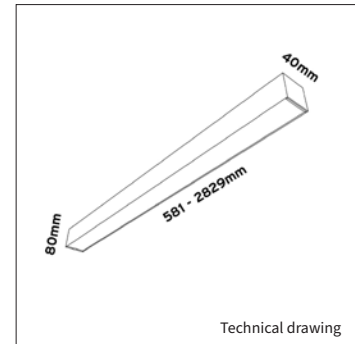

INFORMATION


Nominal lifetime 70.000/L80B10

Luminaires can be connected into long lighting lines

 **Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

DIFFUSER



ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
SINGLE PROFILES OPAL						
Δ See colors						
55.00049.83.E.OP.Δ	581mm	2200lm	14W	157lm/W	3000K	>80
55.00049.81.E.OP.Δ	581mm	2200lm	14W	157lm/W	3500K	>80
55.00049.84.E.OP.Δ	581mm	2200lm	14W	157lm/W	4000K	>80
55.00050.83.E.OP.Δ	862mm	3300lm	20W	165lm/W	3000K	>80
55.00050.81.E.OP.Δ	862mm	3300lm	20W	165lm/W	3500K	>80
55.00050.84.E.OP.Δ	862mm	3300lm	20W	165lm/W	4000K	>80
55.00051.83.E.OP.Δ	1143mm	4400lm	26W	169lm/W	3000K	>80
55.00051.81.E.OP.Δ	1143mm	4400lm	26W	169lm/W	3500K	>80
55.00051.84.E.OP.Δ	1143mm	4400lm	26W	169lm/W	4000K	>80
55.00052.83.E.OP.Δ	1424mm	5500lm	33W	167lm/W	3000K	>80
55.00052.81.E.OP.Δ	1424mm	5500lm	33W	167lm/W	3500K	>80
55.00052.84.E.OP.Δ	1424mm	5500lm	33W	167lm/W	4000K	>80
55.00053.83.E.OP.Δ	1705mm	6600lm	39W	169lm/W	3000K	>80
55.00053.81.E.OP.Δ	1705mm	6600lm	39W	169lm/W	3500K	>80
55.00053.84.E.OP.Δ	1705mm	6600lm	39W	169lm/W	4000K	>80
55.00054.83.E.OP.Δ	1986mm	7700lm	46W	167lm/W	3000K	>80
55.00054.81.E.OP.Δ	1986mm	7700lm	46W	167lm/W	3500K	>80
55.00054.84.E.OP.Δ	1986mm	7700lm	46W	167lm/W	4000K	>80
55.00055.83.E.OP.Δ	2267mm	8800lm	52W	169lm/W	3000K	>80
55.00055.81.E.OP.Δ	2267mm	8800lm	52W	169lm/W	3500K	>80
55.00055.84.E.OP.Δ	2267mm	8800lm	52W	169lm/W	4000K	>80
55.00056.83.E.OP.Δ	2548mm	9900lm	58W	171lm/W	3000K	>80
55.00056.81.E.OP.Δ	2548mm	9900lm	58W	171lm/W	3500K	>80
55.00056.84.E.OP.Δ	2548mm	9900lm	58W	171lm/W	4000K	>80
55.00057.83.E.OP.Δ	2829mm	11000lm	64W	172lm/W	3000K	>80
55.00057.81.E.OP.Δ	2829mm	11000lm	64W	172lm/W	3500K	>80
55.00057.84.E.OP.Δ	2829mm	11000lm	64W	172lm/W	4000K	>80

ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
SINGLE PROFILES UGR<19						
Δ See colors						
55.00049.83.E.MP19.Δ	581mm	2200lm	14W	157lm/W	3000K	>80
55.00049.81.E.MP19.Δ	581mm	2200lm	14W	157lm/W	3500K	>80
55.00049.84.E.MP19.Δ	581mm	2200lm	14W	157lm/W	4000K	>80
55.00050.83.E.MP19.Δ	862mm	3300lm	20W	165lm/W	3000K	>80
55.00050.81.E.MP19.Δ	862mm	3300lm	20W	165lm/W	3500K	>80
55.00050.84.E.MP19.Δ	862mm	3300lm	20W	165lm/W	4000K	>80
55.00051.83.E.MP19.Δ	1143mm	4400lm	26W	169lm/W	3000K	>80
55.00051.81.E.MP19.Δ	1143mm	4400lm	26W	169lm/W	3500K	>80
55.00051.84.E.MP19.Δ	1143mm	4400lm	26W	169lm/W	4000K	>80
55.00052.83.E.MP19.Δ	1424mm	5500lm	33W	167lm/W	3000K	>80
55.00052.81.E.MP19.Δ	1424mm	5500lm	33W	167lm/W	3500K	>80
55.00052.84.E.MP19.Δ	1424mm	5500lm	33W	167lm/W	4000K	>80
55.00053.83.E.MP19.Δ	1705mm	6600lm	39W	169lm/W	3000K	>80
55.00053.81.E.MP19.Δ	1705mm	6600lm	39W	169lm/W	3500K	>80
55.00053.84.E.MP19.Δ	1705mm	6600lm	39W	169lm/W	4000K	>80
55.00054.83.E.MP19.Δ	1986mm	7700lm	46W	167lm/W	3000K	>80
55.00054.81.E.MP19.Δ	1986mm	7700lm	46W	167lm/W	3500K	>80
55.00054.84.E.MP19.Δ	1986mm	7700lm	46W	167lm/W	4000K	>80
55.00055.83.E.MP19.Δ	2267mm	8800lm	52W	169lm/W	3000K	>80
55.00055.81.E.MP19.Δ	2267mm	8800lm	52W	169lm/W	3500K	>80
55.00055.84.E.MP19.Δ	2267mm	8800lm	52W	169lm/W	4000K	>80
55.00056.83.E.MP19.Δ	2548mm	9900lm	58W	171lm/W	3000K	>80
55.00056.81.E.MP19.Δ	2548mm	9900lm	58W	171lm/W	3500K	>80
55.00056.84.E.MP19.Δ	2548mm	9900lm	58W	171lm/W	4000K	>80
55.00057.83.E.MP19.Δ	2829mm	11000lm	64W	172lm/W	3000K	>80
55.00057.81.E.MP19.Δ	2829mm	11000lm	64W	172lm/W	3500K	>80
55.00057.84.E.MP19.Δ	2829mm	11000lm	64W	172lm/W	4000K	>80