


PROFILE 45 KL LOUVER




PRODUCT MATERIAL	Aluminium profile
LIGHT SOURCE	Philips Ledline
MODULE LIFETIME	Approx. 50.000 hours
DRIVER LEDLINE	Including Philips Xitanium driver
COLORS (Δ)	<ul style="list-style-type: none"> ○ 3 = RAL 9003 white ● 5 = RAL 9005 black ● 6 = RAL 9006 alu
DIFFUSER	Parabolic louver
ADJUSTABLE	No
SIZE	Different sizes available

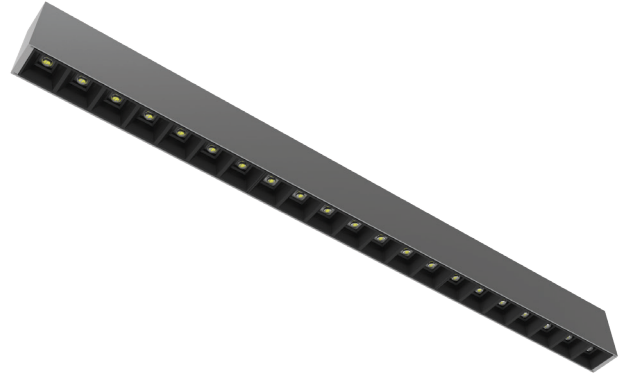

OPTIONS

COLORS	Available in all RAL colours on request Additional price + 10%
DIMMABLE	Dali dimmable
SUSPENSION SET	2 pieces steel cable and a power cable with ceiling base 1500mm
IP CLASS	IP20 in standard, IP44 on request
COLOR RENDERING INDEX	>80 in standard, other on request
MOVEMENT SENSOR	On request
DAYLIGHT CONTROL SENSOR	On request
TUNABLE WHITE	On request
CYAN ENHANCED STATIC	On request

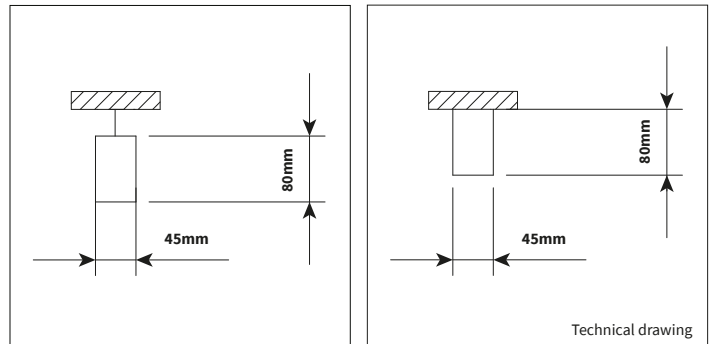

INFORMATION

Bespoke size & product features available

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	NETTO LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME
PROFILE 45 KL LOUVER 1								
Δ See colors								
9296.853.30.Δ	853mm	3100lm	2700lm	19W	163lm/W	3000K	>80	50.000 Hrs
9296.853.35.Δ	853mm	3100lm	2700lm	19W	163lm/W	3500K	>80	50.000 Hrs
9296.853.40.Δ	853mm	3100lm	2700lm	19W	163lm/W	4000K	>80	50.000 Hrs
9296.113.30.Δ	1132mm	4200lm	3650lm	25W	168lm/W	3000K	>80	50.000 Hrs
9296.113.35.Δ	1132mm	4200lm	3650lm	25W	168lm/W	3500K	>80	50.000 Hrs
9296.113.40.Δ	1132mm	4200lm	3650lm	25W	168lm/W	4000K	>80	50.000 Hrs
9296.141.30.Δ	1411mm	5300lm	4600lm	32W	166lm/W	3000K	>80	50.000 Hrs
9296.141.35.Δ	1411mm	5300lm	4600lm	32W	166lm/W	3500K	>80	50.000 Hrs
9296.141.40.Δ	1411mm	5300lm	4600lm	32W	166lm/W	4000K	>80	50.000 Hrs