


PRODUCT MATERIAL	Aluminium profile
LIGHT SOURCE	Philips Fortimo
MODULE LIFETIME	Approx. 50.000 hours
DRIVER	Including on/off driver
COLORS (Δ)	<ul style="list-style-type: none"> ○ 3 = RAL 9003 white ● 5 = RAL 9005 black ● 6 = RAL 9006 alu
REFLECTOR	Aluminium white
SIZE	Different sizes available



OPTIONS

COLORS	Available in all RAL colours on request Additional price + 10%
SUSPENSION SET	1500mm suspension set
DIMMABLE	Dali dimmable
DIFFUSER	White opalic diffuser (OP) or Microprismatic UGR<19 (MP19) see pricelist
EMERGENCY	3 hours
IP CLASS	IP20 in standard, IP44 on request
COLOUR RENDERING INDEX	>80 in standard, other on request
MOVEMENT SENSOR	On request
DAYLIGHT CONTROL SENSOR	On request
TUNABLE WHITE	On request
CYAN ENHANCED STATIC	On request
WIRELESS DIMMABLE	Masterconnect, Easy Air/Zigbee

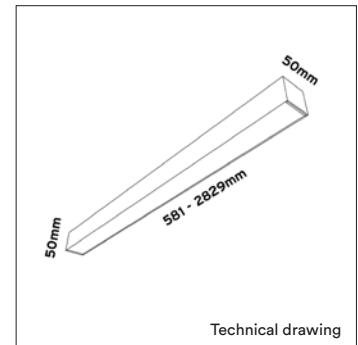



INFORMATION

Nominal lifetime L80/B10 @70.000 h / 25°C

Luminaires can be connected into long lighting lines

- Bespoke size & product features available**
- The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.**


DIFFUSER

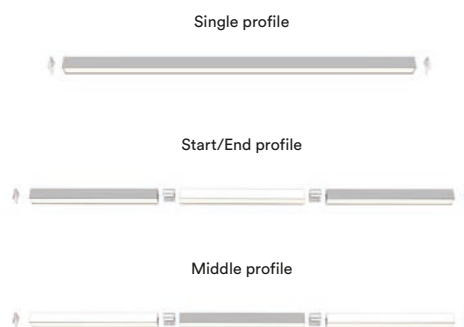


ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
SINGLE PROFILE OPAL (UGR<19 SEE PRICELIST)						
Δ See colors						
55.00499.83.E.OP.Δ	581mm	2200lm	14W	157lm/W	3000K	>80
55.00499.81.E.OP.Δ	581mm	2200lm	14W	157lm/W	3500K	>80
55.00499.84.E.OP.Δ	581mm	2200lm	14W	157lm/W	4000K	>80
55.00500.83.E.OP.Δ	862mm	3300lm	20W	165lm/W	3000K	>80
55.00500.81.E.OP.Δ	862mm	3300lm	20W	165lm/W	3500K	>80
55.00500.84.E.OP.Δ	862mm	3300lm	20W	165lm/W	4000K	>80
55.00501.83.E.OP.Δ	1143mm	4400lm	26W	169lm/W	3000K	>80
55.00501.81.E.OP.Δ	1143mm	4400lm	26W	169lm/W	3500K	>80
55.00501.84.E.OP.Δ	1143mm	4400lm	26W	169lm/W	4000K	>80
55.00502.83.E.OP.Δ	1424mm	5500lm	33W	167lm/W	3000K	>80
55.00502.81.E.OP.Δ	1424mm	5500lm	33W	167lm/W	3500K	>80
55.00502.84.E.OP.Δ	1424mm	5500lm	33W	167lm/W	4000K	>80
55.00503.83.E.OP.Δ	1705mm	6600lm	39W	169lm/W	3000K	>80
55.00503.81.E.OP.Δ	1705mm	6600lm	39W	169lm/W	3500K	>80
55.00503.84.E.OP.Δ	1705mm	6600lm	39W	169lm/W	4000K	>80
55.00504.83.E.OP.Δ	1986mm	7700lm	46W	167lm/W	3000K	>80
55.00504.81.E.OP.Δ	1986mm	7700lm	46W	167lm/W	3500K	>80
55.00504.84.E.OP.Δ	1986mm	7700lm	46W	167lm/W	4000K	>80
55.00505.83.E.OP.Δ	2267mm	8800lm	52W	169lm/W	3000K	>80
55.00505.81.E.OP.Δ	2267mm	8800lm	52W	169lm/W	3500K	>80
55.00505.84.E.OP.Δ	2267mm	8800lm	52W	169lm/W	4000K	>80
55.00506.83.E.OP.Δ	2548mm	9900lm	58W	171lm/W	3000K	>80
55.00506.81.E.OP.Δ	2548mm	9900lm	58W	171lm/W	3500K	>80
55.00506.84.E.OP.Δ	2548mm	9900lm	58W	171lm/W	4000K	>80
55.00507.83.E.OP.Δ	2829mm	11000lm	64W	172lm/W	3000K	>80
55.00507.81.E.OP.Δ	2829mm	11000lm	64W	172lm/W	3500K	>80
55.00507.84.E.OP.Δ	2829mm	11000lm	64W	172lm/W	4000K	>80

ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
START/END PROFILE OPAL (UGR<19 SEE PRICELIST)						
Δ See colors						
55.00510.83.E.OP.Δ	572mm	2200lm	14W	157lm/W	3000K	>80
55.00510.81.E.OP.Δ	572mm	2200lm	14W	157lm/W	3500K	>80
55.00510.84.E.OP.Δ	572mm	2200lm	14W	157lm/W	4000K	>80
55.00511.83.E.OP.Δ	853mm	3300lm	20W	165lm/W	3000K	>80
55.00511.81.E.OP.Δ	853mm	3300lm	20W	165lm/W	3500K	>80
55.00511.84.E.OP.Δ	853mm	3300lm	20W	165lm/W	4000K	>80
55.00512.83.E.OP.Δ	1134mm	4400lm	26W	169lm/W	3000K	>80
55.00512.81.E.OP.Δ	1134mm	4400lm	26W	169lm/W	3500K	>80
55.00512.84.E.OP.Δ	1134mm	4400lm	26W	169lm/W	4000K	>80
55.00513.83.E.OP.Δ	1415mm	5500lm	33W	167lm/W	3000K	>80
55.00513.81.E.OP.Δ	1415mm	5500lm	33W	167lm/W	3500K	>80
55.00513.84.E.OP.Δ	1415mm	5500lm	33W	167lm/W	4000K	>80
55.00514.83.E.OP.Δ	1696mm	6600lm	39W	169lm/W	3000K	>80
55.00514.81.E.OP.Δ	1696mm	6600lm	39W	169lm/W	3500K	>80
55.00514.84.E.OP.Δ	1696mm	6600lm	39W	169lm/W	4000K	>80
55.00515.83.E.OP.Δ	1977mm	7700lm	46W	167lm/W	3000K	>80
55.00515.81.E.OP.Δ	1977mm	7700lm	46W	167lm/W	3500K	>80
55.00515.84.E.OP.Δ	1977mm	7700lm	46W	167lm/W	4000K	>80
55.00516.83.E.OP.Δ	2258mm	8800lm	52W	169lm/W	3000K	>80
55.00516.81.E.OP.Δ	2258mm	8800lm	52W	169lm/W	3500K	>80
55.00516.84.E.OP.Δ	2258mm	8800lm	52W	169lm/W	4000K	>80
55.00517.83.E.OP.Δ	2539mm	9900lm	58W	171lm/W	3000K	>80
55.00517.81.E.OP.Δ	2539mm	9900lm	58W	171lm/W	3500K	>80
55.00517.84.E.OP.Δ	2539mm	9900lm	58W	171lm/W	4000K	>80
55.00518.83.E.OP.Δ	2820mm	11000lm	64W	172lm/W	3000K	>80
55.00518.81.E.OP.Δ	2820mm	11000lm	64W	172lm/W	3500K	>80
55.00518.84.E.OP.Δ	2820mm	11000lm	64W	172lm/W	4000K	>80


ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
MIDDLE PROFILE OPAL (UGR<19 SEE PRICELIST)						
Δ See colors						
55.00650.83.E.OP.Δ	1124mm	4400lm	26W	169lm/W	3000K	>80
55.00650.81.E.OP.Δ	1124mm	4400lm	26W	169lm/W	3500K	>80
55.00650.84.E.OP.Δ	1124mm	4400lm	26W	169lm/W	4000K	>80
55.00651.83.E.OP.Δ	1405mm	5500lm	33W	167lm/W	3000K	>80
55.00651.81.E.OP.Δ	1405mm	5500lm	33W	167lm/W	3500K	>80
55.00651.84.E.OP.Δ	1405mm	5500lm	33W	167lm/W	4000K	>80
55.00652.83.E.OP.Δ	1686mm	6600lm	39W	169lm/W	3000K	>80
55.00652.81.E.OP.Δ	1686mm	6600lm	39W	169lm/W	3500K	>80
55.00652.84.E.OP.Δ	1686mm	6600lm	39W	169lm/W	4000K	>80
55.00520.83.E.OP.Δ	1967mm	7700lm	46W	167lm/W	3000K	>80
55.00520.81.E.OP.Δ	1967mm	7700lm	46W	167lm/W	3500K	>80
55.00520.84.E.OP.Δ	1967mm	7700lm	46W	167lm/W	4000K	>80
55.00521.83.E.OP.Δ	2248mm	8800lm	52W	169lm/W	3000K	>80
55.00521.81.E.OP.Δ	2248mm	8800lm	52W	169lm/W	3500K	>80
55.00521.84.E.OP.Δ	2248mm	8800lm	52W	169lm/W	4000K	>80
55.00522.83.E.OP.Δ	2529mm	9900lm	58W	171lm/W	3000K	>80
55.00522.81.E.OP.Δ	2529mm	9900lm	58W	171lm/W	3500K	>80
55.00522.84.E.OP.Δ	2529mm	9900lm	58W	171lm/W	4000K	>80
55.00523.83.E.OP.Δ	2810mm	11000lm	64W	172lm/W	3000K	>80
55.00523.81.E.OP.Δ	2810mm	11000lm	64W	172lm/W	3500K	>80
55.00523.84.E.OP.Δ	2810mm	11000lm	64W	172lm/W	4000K	>80



ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
L PROFILE OPAL (UGR<19 SEE PRICELIST)						
Δ See colors						
55.00550.83.E.OP.Δ	597mm	4400lm	26W	169lm/W	3000K	>80
55.00550.81.E.OP.Δ	597mm	4400lm	26W	169lm/W	3500K	>80
55.00550.84.E.OP.Δ	597mm	4400lm	26W	169lm/W	4000K	>80



ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
T PROFILE OPAL (UGR<19 SEE PRICELIST)						
Δ See colors						
55.00551.83.E.OP.Δ	1144mm	6600lm	39W	169lm/W	3000K	>80
55.00551.81.E.OP.Δ	1144mm	6600lm	39W	169lm/W	3500K	>80
55.00551.84.E.OP.Δ	1144mm	6600lm	39W	169lm/W	4000K	>80



ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
X PROFILE OPAL (UGR<19 SEE PRICELIST)						
Δ See colors						
55.00552.83.E.OP.Δ	1144mm	8800lm	52W	169lm/W	3000K	>80
55.00552.81.E.OP.Δ	1144mm	8800lm	52W	169lm/W	3500K	>80
55.00552.84.E.OP.Δ	1144mm	8800lm	52W	169lm/W	4000K	>80

ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
EMPTY PROFILE WITH ALU COVER						
Δ See colors						
55.00130.100.Δ	1000mm	-	-	-	-	-

ACCESSOIRES

All accessories such as end caps, linear connectors, quick connectors for system profiles, suspension wires or power cables should be ordered separately both for standalone profiles or lighting systems

Option suspension , also available in 3m (See pricelist)



Suspension

Steel wire 1,5m

Art. no.: 90.00100.15.Δ



3 Core power cable

Transparent 1,5m

Art. no.: 90.00101.15.Δ



5 Core power cable

Transparent 1,5m

Art. no.: 90.00102.15.Δ



End cap

Art. no.: 90.00108.Δ



Linear connector

Art. no.: 90.00118



3 Pole quick connector

Male and female

Art. no.: 90.00112.MF



5 Pole quick connector

Male and female

Art. no.: 90.00113.MF