



## PROFILE 60 KL SR

<b>PRODUCT MATERIAL</b>	Aluminium
<b>LIGHT SOURCE</b>	Philips Ledline
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER LEDLINE</b>	Including Philips Xitanium driver SR
<b>COLORS (Δ)</b>	<ul style="list-style-type: none"> <li>○ 3 = RAL 9003 white</li> <li>● 5 = RAL 9005 black</li> <li>● 6 = RAL 9006 alu</li> </ul>
<b>DIFFUSER</b>	Opalic white
<b>ADJUSTABLE</b>	No
<b>SIZE</b>	60 X 80mm


### SPECIAL FEATURES

Luminaire is equipped with EasyAir Sensor: Communication between luminaires without wires. Easy smartphone commissioning  
Daylight control sensor: Easy Air sensor included  
Movement sensor: Easy Air sensor included  
Dimmable: DALI 2.0 driver included  
Enables gateway data readout  
Xitanium SR interface (based on DALI 2.0)




### OPTIONS

<b>COLORS</b>	Available in all RAL colours on request Additional price + 10%
<b>DIMMABLE</b>	Dali dimmable
<b>DIFFUSER</b>	White opalic diffuser in standard Microprismatic UGR<19 option
<b>EMERGENCY</b>	3 hours
<b>SUSPENSION SET</b>	2 pieces steel cable and a power cable with ceiling base 1500mm
<b>IP CLASS</b>	IP20 in standard, IP44 on request
<b>COLOUR RENDERING INDEX</b>	>80 in standard, other on request
<b>MOVEMENT SENSOR</b>	Included
<b>DAYLIGHT CONTROL SENSOR</b>	Included
<b>TUNABLE WHITE</b>	On request
<b>CYAN ENHANCED STATIC</b>	On request

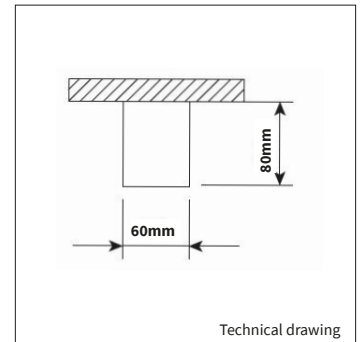

Technical drawing

### DIFFUSER



### INFORMATION

#### ! Bespoke size & product features available

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	NETTO LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME
Δ See colors								
5589.938.30.Δ	938mm	3300lm	2475lm	21W	157lm/W	3000K	>80	50.000 Hrs
5589.938.40.Δ	938mm	3300lm	2475lm	21W	157lm/W	4000K	>80	50.000 Hrs
5589.121.30.Δ	1219mm	4400lm	3300lm	28W	157lm/W	3000K	>80	50.000 Hrs
5589.121.40.Δ	1219mm	4400lm	3300lm	28W	157lm/W	4000K	>80	50.000 Hrs
5589.150.30.Δ	1500mm	5500lm	4125lm	35W	157lm/W	3000K	>80	50.000 Hrs
5589.150.40.Δ	1500mm	5500lm	4125lm	35W	157lm/W	4000K	>80	50.000 Hrs
5589.178.30.Δ	1781mm	6600lm	4950lm	42W	157lm/W	3000K	>80	50.000 Hrs
5589.178.40.Δ	1781mm	6600lm	4950lm	42W	157lm/W	4000K	>80	50.000 Hrs
5589.206.30.Δ	2062mm	7700lm	5775lm	49W	157lm/W	3000K	>80	50.000 Hrs
5589.206.40.Δ	2062mm	7700lm	5775lm	49W	157lm/W	4000K	>80	50.000 Hrs
5589.234.30.Δ	2343mm	8800lm	6600lm	56W	157lm/W	3000K	>80	50.000 Hrs
5589.234.40.Δ	2343mm	8800lm	6600lm	56W	157lm/W	4000K	>80	50.000 Hrs
5589.262.30.Δ	2624mm	9900lm	7425lm	63W	157lm/W	3000K	>80	50.000 Hrs
5589.262.40.Δ	2624mm	9900lm	7425lm	63W	157lm/W	4000K	>80	50.000 Hrs
5589.290.30.Δ	2905mm	11000lm	8250lm	70W	157lm/W	3000K	>80	50.000 Hrs
5589.290.40.Δ	2905mm	11000lm	8250lm	70W	157lm/W	4000K	>80	50.000 Hrs