



PROFILE 60 TW

PRODUCT MATERIAL	Aluminium
LIGHT SOURCE	Philips Ledline
MODULE LIFETIME	Approx. 50.000 hours
DRIVER LEDLINE	Including Philips DALI 2.0 driver
COLORS (Δ)	<ul style="list-style-type: none"> ○ 3 = RAL 9003 white ● 5 = RAL 9005 black ● 6 = RAL 9006 alu
DIFFUSER	Opalic white
ADJUSTABLE	No
SIZE	60 X 76mm

SPECIAL FEATURES

Human Centric Lighting

Our Tunable White luminaires open completely new possibilities to achieve variable settings of colour temperature from 2700K warm white through neutral to 6500K cold white. This allows to achieve optimized light settings for variable type of projects and applications.

Tunable White solution find its use in offices, schools, health care facilities, hospitality business and all other projects where imitation of changing lighting conditions can be used to improve the quality of people working and living.

Light colour temperature change from warm, relaxing white to activating cold white promotes productivity and the opposite light colour temperature change helps to rest after intensive work. Our Tunable White Luminaires have positive influence on the wellbeing of people which experience it.

OPTIONS

COLORS	Available in all RAL colours on request Additional price + 10%
DIMMABLE	Dali dimmable
DIFFUSER	White opalic diffuser in standard Microprismatic UGR<19 option
EMERGENCY	3 hours
SUSPENSION SET	2 pieces steel cable and a power cable with ceiling base 1500mm
IP CLASS	IP20 in standard, IP44 on request
COLOUR RENDERING INDEX	>80 in standard, other on request
MOVEMENT SENSOR	On request
DAYLIGHT CONTROL SENSOR	On request
TUNABLE WHITE	Included
CYAN ENHANCED STATIC	On request

INFORMATION



Luminaires can be connected into long lighting lines

Bespoke size & product features available

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	NETTO LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME
5589.587.65.Δ	587mm	2150lm	1650lm	17W	126lm/W	2700-6500K	>80	50.000 Hrs
5589.114.65.Δ	1149mm	4300lm	3200lm	31W	139lm/W	2700-6500K	>80	50.000 Hrs

Δ See colors

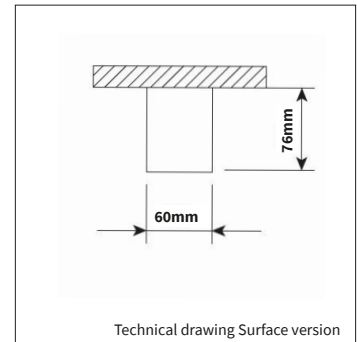

DIFFUSER

