



PRODUCT MATERIAL	Aluminium profile
LIGHT SOURCE	Philips Ledline
MODULE LIFETIME	Approx. 50.000 hours
DRIVER	Including on/off driver
COLORS (Δ)	<ul style="list-style-type: none"> ○ 3 = RAL 9003 white ● 5 = RAL 9005 black ● 6 = RAL 9006 alu
REFLECTOR	Aluminium white
SIZE	See technical drawing

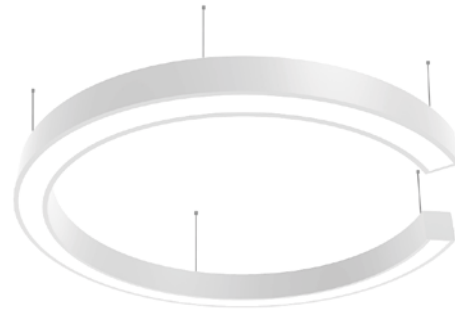

OPTIONS

COLORS	Available in all RAL colours on request Additional price + 10%
DIMMABLE	Dali dimmable
SUSPENSION SET	1500mm suspension set included
IP CLASS	IP20 in standard, IP44 on request
COLOUR RENDERING INDEX	>80 in standard, other on request
MOVEMENT SENSOR	On request
DAYLIGHT CONTROL SENSOR	On request
TUNABLE WHITE	On request
CYAN ENHANCED STATIC	On request
WIRELESS DIMMABLE	Masterconnect, Easy Air/Zigbee

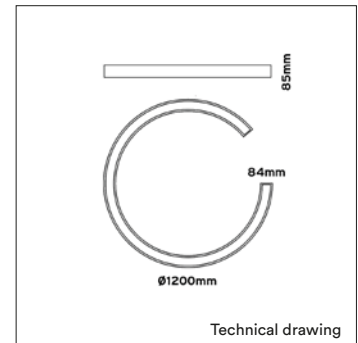

INFORMATION


- Bespoke size & product features available
- The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

DIFFUSER




White opal

ARTICLE NUMBER	DIAMETER	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	MINIMUM ORDER QUANTITY
PROFILE C 90							
Δ See colors							
9280.120.30.Δ	Ø 1200mm	11000lm	73W	151lm/W	3000K	>80	5
9280.120.35.Δ	Ø 1200mm	11000lm	73W	151lm/W	3500K	>80	5
9280.120.40.Δ	Ø 1200mm	11000lm	73W	151lm/W	4000K	>80	5

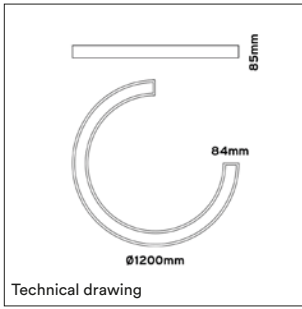


ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	MINIMUM ORDER QUANTITY
PROFILE C 75							
Δ See colors							
9281.120.30.Δ	Ø 1200mm	9900lm	60W	165lm/W	3000K	>80	5
9281.120.35.Δ	Ø 1200mm	9900lm	60W	165lm/W	3500K	>80	5
9281.120.40.Δ	Ø 1200mm	9900lm	60W	165lm/W	4000K	>80	5

PROFILE C 50

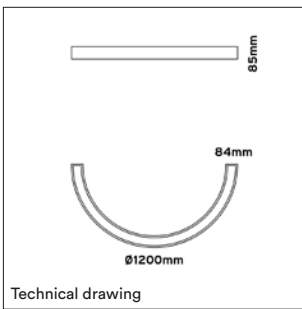

ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	MINIMUM ORDER QUANTITY
PROFILE C 50							
Δ See colors							
9282.120.30.Δ	Ø 1200mm	6600lm	41W	161lm/W	3000K	>80	5
9282.120.35.Δ	Ø 1200mm	6600lm	41W	161lm/W	3500K	>80	5
9282.120.40.Δ	Ø 1200mm	6600lm	41W	161lm/W	4000K	>80	5

PROFILE C 25

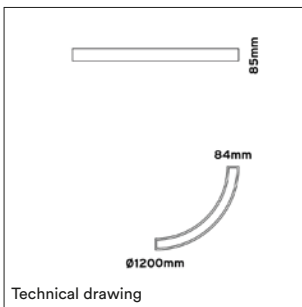

ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	MINIMUM ORDER QUANTITY
PROFILE C 25							
Δ See colors							
9283.120.30.Δ	Ø 1200mm	3300lm	22W	150lm/W	3000K	>80	5
9283.120.35.Δ	Ø 1200mm	3300lm	22W	150lm/W	3500K	>80	5
9283.120.40.Δ	Ø 1200mm	3300lm	22W	150lm/W	4000K	>80	5