



| | |
|-------------------------|--|
| PRODUCT MATERIAL | Aluminium profile |
| LIGHT SOURCE | Philips Ledline |
| MODULE LIFETIME | Approx. 50.000 hours |
| DRIVER | Including on/off driver |
| COLORS (Δ) | <ul style="list-style-type: none"> ○ 3 = RAL 9003 white ● 5 = RAL 9005 black ● 6 = RAL 9006 alu |
| REFLECTOR | Aluminium white |
| SIZE | See technical drawing |

OPTIONS



| | |
|--------------------------------|---|
| COLORS | Available in all RAL colours on request Additional price + 10% |
| DIMMABLE | Dali dimmable |
| IP CLASS | IP20 in standard, IP44 on request |
| COLOUR RENDERING INDEX | >80 in standard, other on request |
| MOVEMENT SENSOR | On request |
| DAYLIGHT CONTROL SENSOR | On request |
| TUNABLE WHITE | On request |
| CYAN ENHANCED STATIC | On request |

INFORMATION

Including 1500mm steel wire suspension with wire length control

Bespoke size & product features available

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

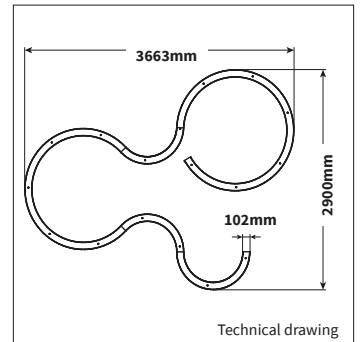

DIFFUSER



White opalic

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | NETTO LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME |
|----------------|---------------|--------------------|--------------------|--------------|-------------------|-------------------|-----|-------------|
| Δ See colors | | | | | | | | |
| 9276.366.30.Δ | 3663 X 2900mm | 40000lm | 27000lm | 247W | 162lm/W | 3000K | >80 | 50.000 Hrs |
| 9276.366.35.Δ | 3663 X 2900mm | 40000lm | 27000lm | 247W | 162lm/W | 3500K | >80 | 50.000 Hrs |
| 9276.366.40.Δ | 3663 X 2900mm | 40000lm | 27000lm | 247W | 162lm/W | 4000K | >80 | 50.000 Hrs |