




PROFILE HEXA 3

PRODUCT MATERIAL	Aluminium profile
LIGHT SOURCE	Philips Ledline
MODULE LIFETIME	Approx. 50.000 hours
DRIVER LEDLINE	Including Philips Xitanium driver
COLORS (Δ)	<ul style="list-style-type: none"> ○ 3 = RAL 9003 white ● 5 = RAL 9005 black ● 6 = RAL 9006 alu
REFLECTOR	Aluminium white with opal cover
ADJUSTABLE	No
SIZE TRIPLE 3.1	See technical drawing
SIZE TRIPLE 3.2	See technical drawing

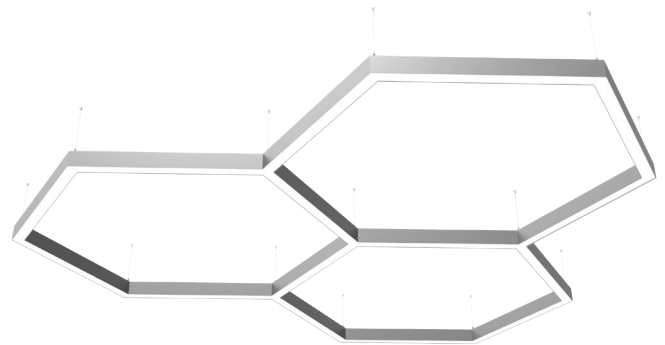

OPTIONS




COLORS	Available in all RAL colours on request Additional price + 10%
DIMMABLE	Dali dimmable
DIFFUSER	White opalic diffuser in standard Microprismatic UGR<19 option
EMERGENCY	3 hours
IP CLASS	IP20 in standard, IP44 on request
COLOUR RENDERING INDEX	>80 in standard, other on request
MOVEMENT SENSOR	On request
DAYLIGHT CONTROL SENSOR	On request
TUNABLE WHITE	On request
CYAN ENHANCED STATIC	On request

INFORMATION


Including 1500mm steel wire suspension with wire length control

Bespoke size & product features available

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

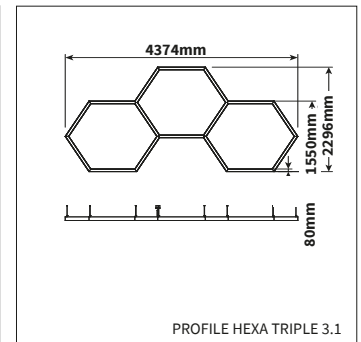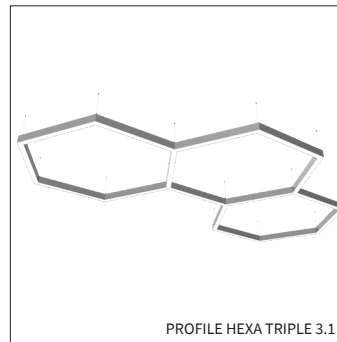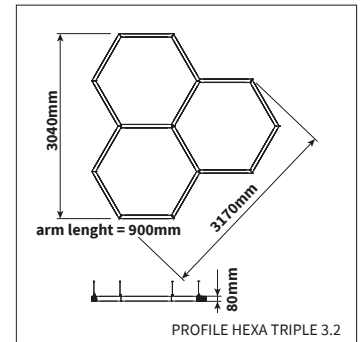

DIFFUSER



ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	NETTO LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME
PROFILE HEXA TRIPLE 3.1								
Δ See colors								
9257.434.30.Δ	4374 X 2296mm	36500lm	25400lm	215W	170lm/W	3000K	>80	50.000 Hrs
9257.434.35.Δ	4374 X 2296mm	36500lm	25400lm	215W	170lm/W	3500K	>80	50.000 Hrs
9257.434.40.Δ	4374 X 2296mm	36500lm	25400lm	215W	170lm/W	4000K	>80	50.000 Hrs
PROFILE HEXA TRIPLE 3.2								
9258.317.30.Δ	3170 X 3040mm	34200lm	23700lm	200W	171lm/W	3000K	>80	50.000 Hrs
9258.317.35.Δ	3170 X 3040mm	34200lm	23700lm	200W	171lm/W	3500K	>80	50.000 Hrs
9258.317.40.Δ	3170 X 3040mm	34200lm	23700lm	200W	171lm/W	4000K	>80	50.000 Hrs