



PRODUCT MATERIAL	Aluminium profile
LIGHT SOURCE	Philips Ledline
MODULE LIFETIME	Approx. 50.000 hours
DRIVER LEDLINE	Including on/off driver
COLORS (Δ)	<ul style="list-style-type: none"> ○ 3 = RAL 9003 white ● 5 = RAL 9005 black ● 6 = RAL 9006 alu
REFLECTOR	Aluminium white with opal cover
ADJUSTABLE	No
SIZE	See technical drawing

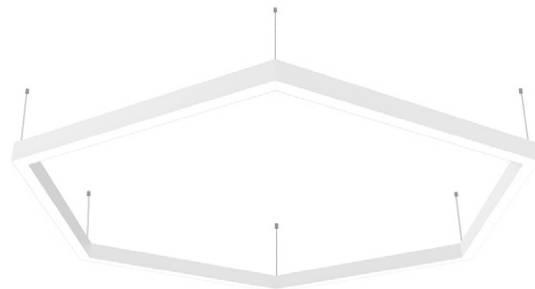

OPTIONS

COLORS	Available in all RAL colours on request Additional price + 10%
DIMMABLE	DALI On request
SUSPENSION SET	1500mm Included
DIFFUSER	White opalic diffuser (OP) or Microprismatic UGR<19 (MP19) option
EMERGENCY	3 hours
IP CLASS	IP20 in standard, IP44 on request
CRI	>80 in standard, other on request
MOVEMENT SENSOR	On request
DAYLIGHT SENSOR	On request
TUNABLE WHITE	On request
CYAN ENHANCED STATIC	On request
WIRELESS DIMMABLE	Masterconnect, Easy Air/Zigbee

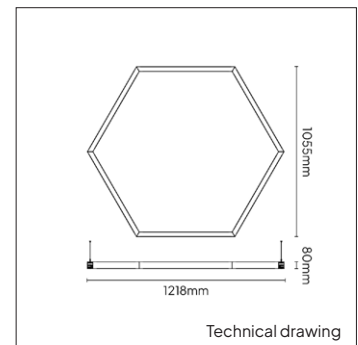

DIFFUSER



White opalic



Microprismatic UGR<19

INFORMATION

Nominal lifetime L80/B10 @70.000 h / 25°C

! Bespoke size & product features available

! The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
OPAL						
Δ See colors						
55.00470.83.E.OP.Δ	1200mm	13200lm	80W	165lm/W	3000K	>80
55.00470.81.E.OP.Δ	1200mm	13200lm	80W	165lm/W	3500K	>80
55.00470.84.E.OP.Δ	1200mm	13200lm	80W	165lm/W	4000K	>80
55.00471.83.E.OP.Δ	1800mm	19800lm	119W	166lm/W	3000K	>80
55.00471.81.E.OP.Δ	1800mm	19800lm	119W	166lm/W	3500K	>80
55.00471.84.E.OP.Δ	1800mm	19800lm	119W	166lm/W	4000K	>80
55.00472.83.E.OP.Δ	2400mm	26400lm	159W	166lm/W	3000K	>80
55.00472.81.E.OP.Δ	2400mm	26400lm	159W	166lm/W	3500K	>80
55.00472.84.E.OP.Δ	2400mm	26400lm	159W	166lm/W	4000K	>80
UGR<19						
55.00470.83.E.MP19H.Δ	1200mm	13200lm	80W	165lm/W	3000K	>80
55.00470.81.E.MP19H.Δ	1200mm	13200lm	80W	165lm/W	3500K	>80
55.00470.84.E.MP19H.Δ	1200mm	13200lm	80W	165lm/W	4000K	>80
55.00471.83.E.MP19H.Δ	1800mm	19800lm	119W	166lm/W	3000K	>80
55.00471.81.E.MP19H.Δ	1800mm	19800lm	119W	166lm/W	3500K	>80
55.00471.84.E.MP19H.Δ	1800mm	19800lm	119W	166lm/W	4000K	>80
55.00472.83.E.MP19H.Δ	2400mm	26400lm	159W	166lm/W	3000K	>80
55.00472.81.E.MP19H.Δ	2400mm	26400lm	159W	166lm/W	3500K	>80
55.00472.84.E.MP19H.Δ	2400mm	26400lm	159W	166lm/W	4000K	>80