



PRODUCT MATERIAL

Aluminium profile

LIGHT SOURCE

Philips Ledline

MODULE LIFETIME

Approx. 50.000 hours

DRIVER LEDLINE

Including on/off driver

COLORS (Δ)

- 3 = RAL 9003 white
- 5 = RAL 9005 black
- 6 = RAL 9006 alu

REFLECTOR


Aluminium white

ADJUSTABLE

No



SIZE

See technical drawing

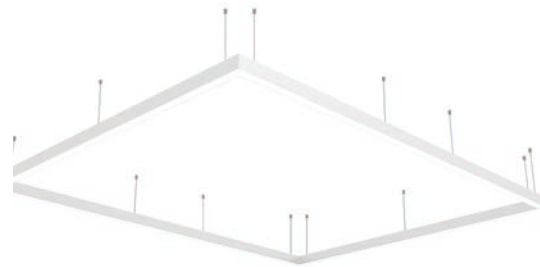

OPTIONS


COLORS	Available in all RAL colours on request Additional price + 10%
DIMMABLE	Dali dimmable
SUSPENSION SET	1500mm suspension set included
DIFFUSER	White opalic diffuser or Microprismatic UGR<19 option
EMERGENCY	3 hours
IP CLASS	IP20 in standard, IP44 on request
COLOUR RENDERING INDEX	>80 in standard, other on request
MOVEMENT SENSOR	On request
DAYLIGHT CONTROL SENSOR	On request
TUNABLE WHITE	On request
CYAN ENHANCED STATIC	On request
WIRELESS DIMMABLE	Masterconnect, Easy Air/Zigbee

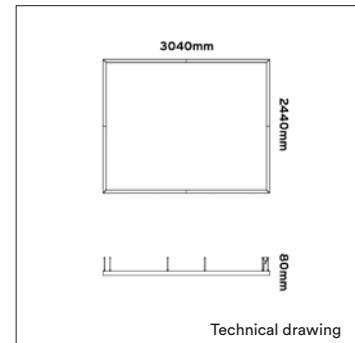

INFORMATION

- ⚠ Bespoke size & product features available
- ⚠ The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

DIFFUSER



ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
Δ See colors						
9273.244.30.Δ	2440 X 3040mm	59400lm	361W	165lm/W	3000K	>80
9273.244.35.Δ	2440 X 3040mm	59400lm	361W	165lm/W	3500K	>80
9273.244.40.Δ	2440 X 3040mm	59400lm	361W	165lm/W	4000K	>80